



PRE-RELEASE INFORMATION

GMDSS MF/HF TRANSCEIVER with CLASS A DSC

GM800



Day mode display (DSC scan screen)

MF/HF GMDSS

Global Maritime Distress and Safety System

Reliable Performance
for MF/HF Long Distance Communication

Satisfies the SOLAS Carriage Requirements
for a MF/HF Class A DSC Radio

Will Meet MED* "Wheel Mark" Requirements

* Type approval pending as of November, 2015.

Large and High Contrast 4.3 inch Color
TFT LCD with Day and Night Mode

New Intuitive User Interface
for Straightforward Operation

IPX7 Waterproof Construction
(Controller only)



MED

(Type approval pending as of November, 2015.)

IPX7

(Controller only)



Night mode display

Please Note: The complete GMDSS installation for MF/HF DSC (Class A) and telephony additionally requires the optional antenna tuner, AT-141.

Satisfies SOLAS Carriage Requirements

The GM800 meets the GMDSS requirements as required for SOLAS regulated commercial vessels engaging in international voyage. The GM800 will meet the MED*, "wheel mark" requirements for European merchant ships.
* Type approval pending as of November, 2015.

ITU Class A DSC (ITU-R M.493-13)

A dedicated DSC watch receiver continuously scans the six distress channels in rotation. The DSC Multi-task function shows up to seven DSC procedures. The GM800 is also capable of sending a distress relay call.

Large 4.3 inch Color TFT LCD

The color TFT LCD offers user-friendly icons and display design. The improved font allows quick recognition of screen information. You can select the day and night modes according to the lighting conditions.

New Intuitive User Interface

Menu items are shown with user-friendly icons and that can be navigated via the main dial knob or the up and down keys. Often-used functions are lined up at the bottom of the display and can be toggled with the left and right keys.

And More

- IPX7 waterproof construction for controller (1m depth of water for 30 minutes)
- 125W* (PEP) output power
* 85W (PEP) 1.6-3.999MHz
- Built-in 24V DC-DC converter
- 57mm diameter front speaker
- IEC 61162-1 for GPS connection
- Unified design with GM600 (VHF)

Supplied accessories:

- Handset, HS-98
- Mounting brackets
- DC power cable

SPECIFICATIONS

GENERAL		
Frequency range	Tx	1.6-27.5000MHz (ITU marine channels)
	Rx	0.5-29.9999MHz (continuously)
	DSC	2.1875, 4.2075, 6.3120, 8.4145, 12.5770, 16.8045MHz
Type of emission	Tx/Rx	J3E (USB/LSB*), J2B (AFSK), F1B (FSK), A1A* (CW), H3E* (AM)
	DSC	F1B * Receive only
Number of channels		1237 channels (maximum) (160 user-programmable; 249 ITU SSB duplex; 72 ITU SSB simplex; 21 C1; 31 C2; 704 ITU FSK duplex)
Power supply requirement		21.6-31.2V DC (24V DC) (floating ground)
Current drain (approx. at 24V)		
	Tx Maximum power	Less than 20A (at 1.1kHz and 1.7kHz two tones)
	Rx Maximum audio	Less than 3A
Operating temperature range		-15°C to +55°C
Antenna impedance		50Ω (SO-239x2)
Frequency stability	Tx/Rx	±10Hz (0.5-29.9999MHz)
	DSC	±10Hz
NMEA Interface		GGA, GNS, GLL, RMC
TRANSMITTER		
Rated output power (at AT-141 output power)		85W PEP (1.6-3.999MHz) 125W PEP (4.0-27.500MHz)
Spurious emissions		43dB below peak output power (Maximum power)
Carrier suppression		40dB below peak output power (Maximum power)
Unwanted sideband suppression		55dB below peak output power (Max. power) (With 1000Hz AF input)

RECEIVER			
Sensitivity			
	0.5-1.599MHz	1.6-3.999MHz	4.0-29.999MHz
J3E, A1A (20dB SINAD)	30dBμV emf.	16dBμV emf.	11dBμV emf.
H3E (20dB SINAD)	44dBμV emf.	30dBμV emf.	-
	1.6-2.099MHz	2.1-27.500MHz	
J2B, F1B (1% error rate)	3dBμV emf.	0dBμV emf.	-
DSC (J2B) (1% error rate)	0dBμV emf. (2.1875, 4.2075, 6.3120, 8.4145, 12.5770, 16.8045MHz)		
Squelch sensitivity (at signal strength meter)	J3E	(Threshold/Tight) Less than +20dBμV/Less than +90dBμV (at 12.230MHz) Less than +30dBμV/Less than +110dBμV (at 1.000MHz)	
Spurious response rejection	J3E	More than 60dB (0.5-29.999MHz)	
	J2B	More than 80dBμV emf.	
Audio output power	Internal SP	2W with 8Ω load (at 10% distortion)	
	External SP	4W with 4Ω load (at 10% distortion)	
Clarity variable range		±150Hz	

All stated specifications are subject to change without notice or obligation.

Applicable IP Rating


Ingress Protection Standard	
Water	IPX7* (1m depth of water for 30 minutes) * Controller only

OPTIONS


Some options may not be available in some countries. Please ask your dealer for details.

<p>AT-141 AUTOMATIC ANTENNA TUNER</p> <p>IP56</p>  <p>IP56 rating for dust and powerful water jet protection.</p>	<p>OPC-1465 SHIELDED CONTROL CABLE</p>  <p>10m; 32.8ft cable</p>
<p>MB-108 MOUNTING BRACKET</p>  <p>Photo shows installation example.</p>	<p>HM-214H SPEAKER-MICROPHONE</p> 
<p>HS-98 HANDSET</p> 	<p>SP-24E EXTERNAL SPEAKER</p>  <p>Input impedance: 4Ω. Maximum input power: 7W.</p>

INTERCONNECTION DIAGRAM

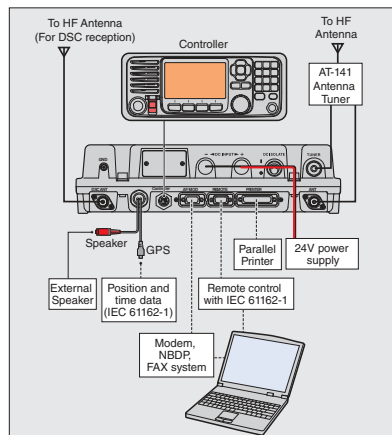

DIMENSIONS

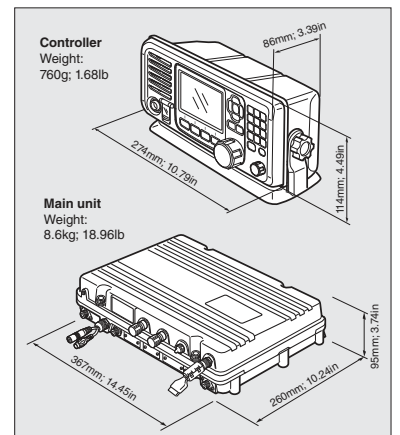

This device has not been approved by the appropriate authorities in each country. This device may not be sold or leased, or be offered for sale or lease, until approval has been obtained. All stated features, appearances, screen shots and specifications may be subject to change without notice. Icom, Icom Inc. and Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. All other trademarks are the properties of their respective holders.

Icom Inc. 1-1-32, Kami-minami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icom.co.jp/world

Count on us!

Your local distributor/dealer:



Advantec Srl

Via Caduti per la Libertà, 13

10060 Pinasca TO - Italy

Tel. +39 0121326770

info@advantec.it - www.advantec.it