

PNC360S

Push-To-Talk Over Cellular Radio

The Power of Simplicity



PTT talk over
Public network



Rugged and durable



Crystal and loud audio



Long battery life





Overview

Hytera PNC360S Push-to-Talk over Cellular (PoC) radio simplifies the way to communicate with your teammates. This radio can be operated on the widely available public network to deliver instant communications at the push of a button. It is the best choice for those engaged in supermarkets, hotels, logistics, industrial parks, urban and property management, and more.

With its compact and ergonomic design, the PNC360S is easy for one-handed use. The built-in high power speaker delivers loud and clear audio so that you never miss any word in highly noisy environments. The 4,000 mAh battery can outlast your shift on a single charge. Certificated with IP67 and MIL-STD-810H, the PNC360S is durable and reliable to be used in the toughest conditions.



Best-in-class audio

The PNC360S provides loud and clear audio even in noisy environments. The 3.0-watt built-in speaker ensures speech loudness, and the distortion suppression and noise cancellation technologies are adopted to boost the audio clarity. With the howling suppression algorithm, no feedback howling occurs between two radios within 3 meters.

Compact and portable

With 26.5 mm thickness, the PNC360S is compact and superbly portable. It fits comfortably in your palm or pocket. The enhanced ergonomic design, especially the one-sided key layout, makes the radio easier to use with one hand. And the anti-slip texture surface can reduce accidental drops even in moist conditions.



Longer-lasting battery

The PNC360S comes with a 4,000 mAh battery that provides power for an entire shift easily on a single charge.
The fast charging gives you hours of power in minutes of charge.



Reliable and durable

Certified with IP67 rating and MIL-STD-810H standard, the PNC360S is made tough to withstand water, dust, shock, extreme temperatures, and sudden drop up to 1.2 meters. It always performs as expected in any harsh environments.



Low Pressure Test

Pressure: 57 kPa

Time: 1 hour

Rain-proof Test

Raindrop diameter:
0.5 mm to 4.5 mm

Rainfall intensity: 10 cm/h



RH Humidity Test

Temperature: 30°C ~ 60°C

Humidity: (95±5) RH


Solar Radiation Test

Total radiation intensity:
1120W/m²

Temperature: 49°C

Accessories

Standard ☐ Optional ☐

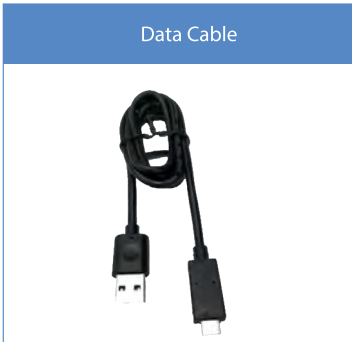

Application Scenarios



Specifications

General		
Frequency	European & Asian Areas	GSM: 850/900/1800/1900 CDMA: BC0 WCDMA: B1/B3/B5/B8 TD-SCDMA: B34/B39 LTE TDD: B38/B39/B40/B41 LTE-FDD: B1/B3/B5/B7/B8/B20/B26/B28
	American Areas	FDD-LTE: B2/B3/B4/B5/B7/B12/B13/B17/B26/B28 TDD-LTE: B38/B41 WCDMA: B2/B4/B5 GSM: 850/900/1800/1900
Operating System	Android 7.0	
Dimensions (H x W x D)	104mm*54.6mm*26.5mm	
Weight	About 190g (including back clip)	
Memory	1GB RAM+8GB ROM	
Non-touch Screen Size	1.77 inches	
Non-touch Screen Resolution	160 x 128	
SIM Card	1 Nano-SIM	
BT	BT4.1	
WIFI	2.4GHz, 802.11 b/g/n	
Positioning	GPS/BeiDou/Glonass/Galileo/AGPS	
External Interface	USB Type-C port, 3.5 mm audio jack	
Battery	4,000 mAh, detachable	
Charging Mode	USB Type-C	
Speaker Power	2 W (rated), 3 W (max)	
Environment Standards		
Operating Temperature	-20°C to +60°C	
Storage Temperature	-30°C to +70°C	
ESD	IEC 61000-4-2,(ESD)± 12 kV (Air); ±8 kV (Contact)	
Ingress Protection	IP67	
Drop-proof	1.2m	
Certification		
Certification	MIL-STD-810H,CE,FCC	

Distributore Autorizzato per l'Italia:



Advantec Srl
Via Caduti per la Libertà, 13 10060
Pinasca TO - Italy
Tel. +39 0121326770
info@advantec.it - www.advantec.it



Hytera Communications Europe
939 Yeovil Road, Slough, Berkshire, SL1 4NH
info@hytera-europe.com | www.hytera-europe.com

Hytera reserves the right to modify the product design and the specifications. In case of a printing error, Hytera does not accept any liability. All specifications are subject to change without notice.