

PROFESSIONAL DMR MOBILE RADIO

HM785

EMPOWER YOUR OPERATION



EMPOWER YOUR OPERATION

Leading the PMR industry, Hytera possesses comprehensive capabilities of software and hardware development and continually evolves for more than 30 years to provide solutions to tens of thousands of PMR users worldwide.

Hytera now presents the next generation of professional digital mobile radio, the flexible and scalable HM785. The HM785 supports a standard single control head and remote control head (Single or dual) to suit different environments such as vehicles, motorcycles and fixed control rooms, ensuring efficient communication. Moreover, it provides various connections, through which rich applications can be integrated into existing services to improve work efficiency.

The HM78X adopts a new appearance while maintaining high quality. The new UI interaction facilitates faster operation. The AI-based noise cancellation technology guarantees clearer voice in noisy environments.



ENHANCED DESIGN


2.4-inch screen, simple UI interaction
assists in operating quickly

Standard 1DIN size

Faster cooling with all-aluminum
case design

Built-in speaker assures clear and loud voice
even without an external speaker

Built-in BT 5.3, allows wireless accessory
(such as wireless remote speaker microphone)
adaptation and data transmission.

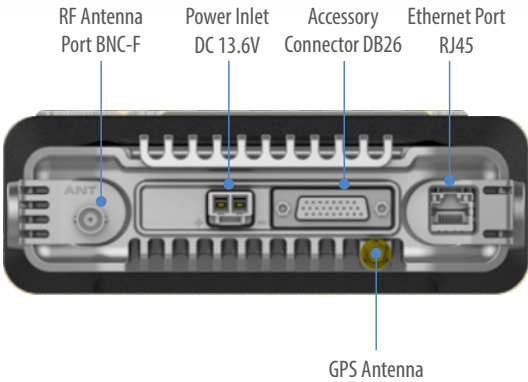

PRODUCT HIGHLIGHTS

MORE FLEXIBLE INSTALLATION

With the flexible control heads and accessories, the HM785 can be installed in various environments to satisfy different use requirements. The connection cable of the remote control head can be either 3m, 10m or 40m as standard. A connection cable of up to 100m is also available(Customisation required).

Form	 Standard control head	 Remote single/dual control head	 Fixed station
Application	Small vehicles, motorcycles	Ambulance, fire engine, truck, large bus, dispatching room	desktop office

AI-BASED NOISE CANCELLATION FOR CLEARER AUDIO

The HM785 adopts AI noise cancellation technology to filter out background noise (such as road noise), eliminate echoes, extract human voices from noise, and reduce howling and exhalation sounds at close proximity. With this technology, the mobile radio provides crisper and clearer audio for the other party.

The advantages of AI noise cancellation are as follows.

- **Clearer**
Extremely high noise cancellation on steady and unsteady noise, up to 30dB
Can reduce howling outside 30cm
- **Faster**
Accurately extract human voices from noise in milliseconds or even without delay
- **Flexible**
With deep learning ability, suitable for more noise
10-level adjustable noise reduce level

FULL DUPLEX CALL

HM785 can make full duplex call with HM785, telephone or cell phone.

MAIN FEATURES

Operating Modes

- Conventional(digital/analog)
- Digital trunking

Text Message

- Private message
- Group message
- Quick text
- Status Message

Solution

- IP Transit
- Back to back
- Wireless link
- Clarity Transmission
- SFR

Voice Service

- Private call
- Group call
- All call
- Full duplex call

Security

- Emergency alarm
- Lone worker
- Authentication
- Over the air encryption
- E2EE
 - Basic encryption
 - Full encryption
 - Hardware encryption

GPIO Pins

- Public Address
- Horn & Lights
- Voice notify
- Ignition sense

Supplementary

- Alert call(conventional)
- Remote monitor
- Enable/Disable
- Radio check

Analog Mode

- 2-Tone signaling
- 5-Tone Signalling
- HDC1200

RICH SCALABLE APPLICATION


HM785 supports multiple connections through BT, and the accessory and network (Ethernet) ports. It also supports Clarity Transmission, back to back connections and SFR which will greatly facilitate your solutions. Examples include:

- The coverage in conventional digital mode can be extended by IP Transit.
- Allow for collection of data from equipment (Wired or BT) and facilitate transmission of this data to the background platforms using either the IP or radio network.
- Cross-band or cross-system communication can be achieved through Back-to-Back or IP Transit.
- For situations where repeaters cannot be connected via IP or the cost of doing so is too high, the repeaters can be connected via cable to HM785 to create a wireless link between regions. This could be useful in industries such as oil extraction where offshore oil rigs are used.

Application Solution

Clarity Transmission

The data Clarity Transmission feature provides a transparent channel for data transmission without any change. As a part of the data acquisition and monitoring control system, the HM785 provides customers with solutions for monitoring and controlling industrial production processes.

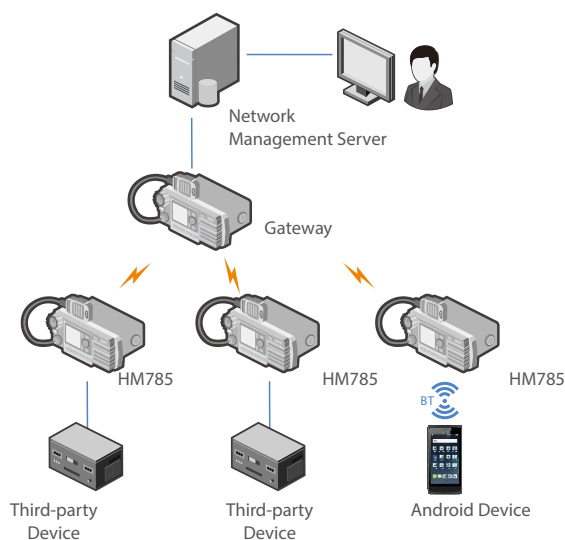


IP Transit Solution (Digital Mode)

With the Ethernet interface of HM785, IP Transit offers an economical and simple networking solution that complements the existing two-way radio system.


It can connect two or more conventional communication systems in different areas through IP network to solve the communication problems across regions, complex terrains, or in buildings where signals are difficult to penetrate.

It can connect mobile radios working with different frequency bands to solve the across-band communication problems, this greatly saves on cost due to only requiring one frequency and it moves the need for additional infrastructure and complex configuration.

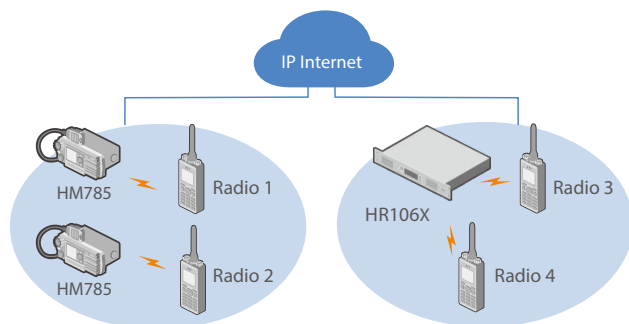



Single Frequency Repeater Mode(Digital mode)

Based on Interference cancellation technique, HM785 can use one slot to receive signal and the other to transmit it in the same frequency at the same time in DMO mode to extend communication distance.

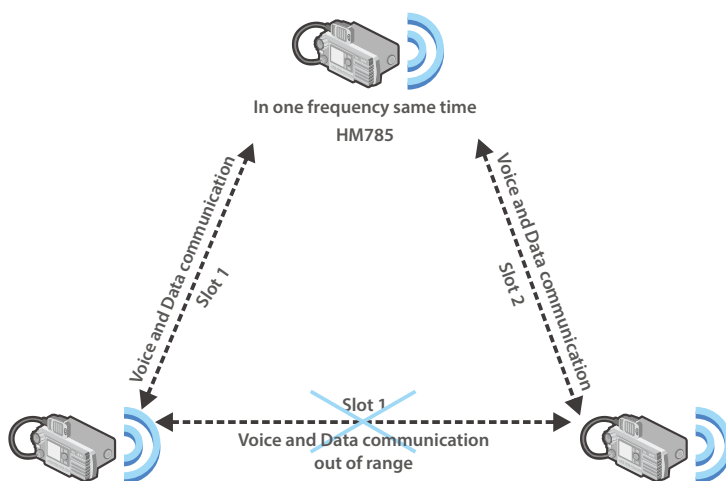

The IP Transit solution supports the following services:

- All voice calls (including calls with acknowledgement)
- All data services
- All signaling

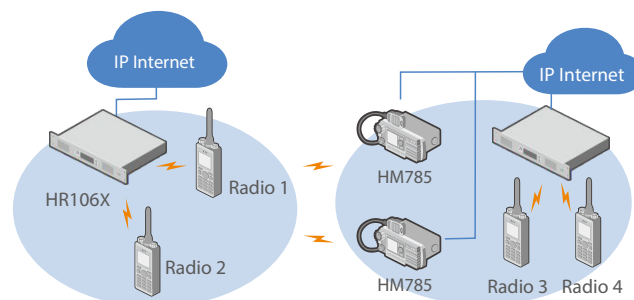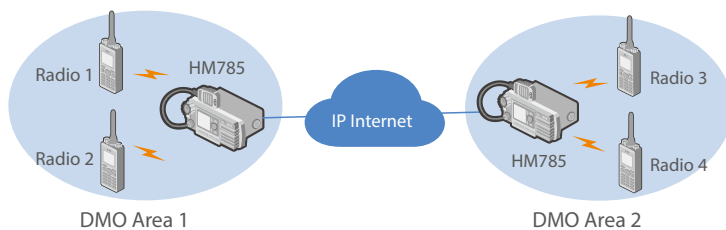

Police Car Application



Fire Engine Application

Conventional(digital/analog)
Digital trunking
Remote single/dual control head



SPECIFICATIONS

General			
Frequency Range	UHFv: 350-470MHz, UHF2: 450-527MHz, VHF: 136-174MHz, UHF5: 806-825MHz(only transmit), 851-870MHz(transmit & receive), 896-902MHz(only transmit), 935-941 (transmit & receive)		
Channel Capacity	1024		
Zone Capacity	64(each with a maximum of 256 channels)		
Channel Spacing	12.5kHz/20kHz/25kHz		
Operating Voltage	13.6 V ±15%		
Current Drain	Standby	< 0.5A	
	Receive	< 2.0A	
	Transmit	1W	<3A
		5W	<4A
		25W	<8A
		45W/50W	<12A
Frequency Stability	±0.5 ppm		
Antenna Impedance	50Ω		
Dimensions (H x W x D)	61.5 x 177 x 179 mm		
Weight	1520g		
LCD Display	2.4 inch		

Receiver			
Sensitivity	Analog	0.18μV(12dB SINAD) 0.16μV(Typical)(12dB SINAD)	
	Digital	0.18μV/BER5%	
Selectivity	TIA-603	65dB@12.5kHz / 75dB@20/25kHz	
	ETSI	60dB@12.5kHz / 70dB@20/25kHz	
Intermodulation	TIA-603	75dB@12.5/20/25kHz	
	ETSI	70dB@12.5/20/25kHz	
Spurious Response Rejection	TIA-603	75dB@12.5/20/25kHz	
	ETSI	70dB@12.5/20/25kHz	
Blocking	TIA-603	80dB	
	ETSI	84dB	
Hum and Noise		40dB@12.5kHz,43dB@20kHz, 45dB@25kHz	
Rated Audio Power Output		Internal (20 Ohm load)	3W
		External (8 Ohm load)	7.5W
Max Audio Power Output		Internal (20 Ohm load)	8W
		External (8 Ohm load)	20W
Rated Audio Distortion		≤3%	
Audio Response		+1 ~ -3dB	
Conducted Spurious Emission		<-57dBm	

Transmitter		
RF Power Output	Low power :	High power:
	136-174MHz:5-25W 350-527MHz:1-25W UHF5: 806-825MHz:10-35W 896-902MHz:10-30W	136-174MHz:5-50W 350-527MHz:1-45W 851-870MHz:10-35W 935-941MHz:10-30W
FM Modulation	11K0F3E@12.5kHz; 14K0F3E@20kHz; 16K0F3E@25kHz	
4FSK Digital Modulation	12.5kHz Data Only: 7K60FXD 12.5kHz Data and Voice: 7K60FXW	
Conducted/Radiated Emission	-36dBm<1GHz; -30dBm>1GHz	
Modulation Limiting	±2.5kHz @ 12.5kHz; ±4.0kHz @ 20kHz; ±5.0kHz @ 25kHz	
FM Hum & Noise	40dB @ 12.5kHz; 43dB @ 20kHz 45dB @ 25kHz	
Adjacent Channel Power	60dB @ 12.5kHz; 70dB @ 20/25kHz	
Audio Response	+1 ~ -3dB	
Audio Distortion	≤3%	
Digital Vocoder Type	AMBE+2™	
Digital Protocol	ETSI-TS102 361-1,-2,-3,-4	

Environmental	
Operating Temperature	-30°C~+60°C
Storage Temperature	-40°C~+85°C
ESD	IEC 61000-4-2 (Level 4) ±8kV (Contact) ±15kV (Air)
Dustproof & Waterproof	IP54
Humidity	Per MIL-STD-810H Standard
Shock & Vibration	Per MIL-STD-810H Standard

Location Service	
GNSS	*GPS, GPS+GLONASS, GPS+BD5
TTFF (Time To First Fix) Cold Start	<1 minute
TTFF (Time To First Fix) Hot Start	<10seconds
Horizontal Accuracy	<5meters

*Accuracy specs are for long-term tracking (95th percentile values>5 satellites visible at a nominal -130dBm signal strength)

ACCESSORIES

Standard



Conventional model:
palm microphone
without keypad



Trunking model:
palm microphone
with keypad



Telephone Style Handset



Mounting bracket



Power cord



Fuse



Model with GPS:
GPS antenna

Optional



DB26 connector
external speaker



10-pin connector
desktop microphone



Power supply for
mobile radio



Programming cable



DB26 Connector foot PTT



Ignition cable



Antenna



DB26M-DB9M cable connects
mobile radio and repeater for
wireless link solution



DB26-DB26 cable connects
two repeater to realize
cross-band(VHF_UHF) or
cross mode(analog_digital)
communication



Power supply of fixed
station cabinet



BT Wireless remote
speaker microphone



BT Wireless ring PTT

Distributore Autorizzato per l'Italia:



Advantec Srl
Via Caduti per la Libertà, 13 10060
Pinasca TO - Italy
Tel. +39 0121326770
info@advantec.it - www.advantec.it



Hytera Communications Europe
939 Yeovil Road, Slough, Berkshire, SL1 4NH
info@hytera-europe.com | www.hytera-europe.com

Hytera reserves the right to modify the product design and the specifications. In case of a printing error, Hytera does not accept any liability. All specifications are subject to change without notice.