



# PRODUCT CATALOG

# TABLE OF CONTENTS

Who We Are?	4
Our Team	5
Holistic Approach	6
Portfolio	8
Our Focus	9
<b>RMS</b>	
RMS - REMOTE MANAGEMENT SYSTEM	10
Use Case: Centralized remote vending machine POS system management	14
Use case: Remote calibration and control of smart traffic lights	15
<b>CELLULAR</b>	
TRM240	18
TRM250	20
TRB140	22
TRB141	24
TRB142	26
TRB143	28
TRB145	30
TRB245	32
TRB255	34
TRB500	36
Use Case: Manufacturing facility remote management	38
Use Case: Wireless parking availability data transmission	39
RUT200	40
RUT240	42
RUT241	44
RUT360	46
RUT901	48
RUT950	50
RUT951	52
RUT955	54
RUT956	56

RUTX09	58
RUTX11	60
RUTX12	62
RUTX14	64
RUTX50	66
RUTXR1	68
TCR100	70
Use Case: Safe and simple to set up home network with TCR100	72
Use Case: Wireless broadband connectivity for gas station	73
<b>ETHERNET &amp; WIRELESS</b>	
TSW010	76
TSW100	78
TSW101	80
TSW110	82
TSW114	84
TSW200	86
TSW210	88
TSW304	90
Use case: Remotely managed surveillance solution for logistics center	92
Use case: Voip connectivity across branches and home offices	93
RUT300	94
RUTX08	96
RUTX10	98
Use Case: Mesh network enabling smart factory connectivity	100
Use Case: Secure connectivity for bank branches	101
CELLULAR device comparison	102
ETHERNET & WIRELESS device comparison	104
<b>ACCESSORIES</b>	
Powering Options	105
Antennas Options	106
Mounting Options	107

# WHO WE ARE?

**24 YEARS  
OF IoT BUSINESS**

We are a rapidly growing technology company, manufacturing professional network connectivity equipment for international markets. Through long-term experience and research and development of industrial network devices for IoT and M2M communication, we have developed a wide portfolio of products for the most complex areas, such as Industry 4.0, Smart City, and Green Energy.



## OUR MISSION IS

to be a fast and flexible partner and be closer to our clients in every world region. Longstanding experience, reliable supply chain, and highest technology process models enable us to produce millions of IoT devices to our clients.

## OUR VISION IS

to become one of the global leaders providing unique IoT solutions that contribute to making people's lives easier. We are open-minded to establish the environment for the creative and ambitious work professionals in Lithuania and the rest of the world to grow and contribute towards our Mission.

## OUR VALUES ARE

not only working but also living to help and sharing kindness to people, especially those who need our help the most. We are keeping our values by continuously and courageously creating synergy between Teltonika IoT Group and business partners as well as clients.

**30  
OFFICES  
IN 19  
COUNTRIES**

# OUR TEAM

## BIGGEST STRENGTH!

Teltonika Networks has a proven track record of rapid growth within professional and industrial cellular connectivity market segments. It would not be possible without a strong, ambitious, and continuously growing team.

**640+**

employees world wide

**58%**

overall team growth in 2021

**67%**

RND team growth in 2021

**21+**

nationalities

**B2B TELTONIKA  
ACADEMY**

**IoT TELTONIKA  
ACADEMY**

**MORE THAN 330  
COMPLETED INTERNSHIPS**

## GROWING TALENT

We have established IoT and B2B academies that closely collaborate with local universities by hosting guest lectures and supporting them with custom scholarships. However, the biggest gain of these academies is the student internships. During them, we share all of our know-how and experience. This practice is also beneficial to us as it helps to attract the best talent to join our young but already experienced team.

# HOLISTIC APPROACH



From concept to the finished product - we develop everything in-house to ensure maximum quality and efficiency. It enables us to move much faster because we do not rely on any externalities.

Over the years, we have implemented hundreds of customized projects, from the smallest firmware changes to full-scale hardware alterations. This experience helped our partners capture more opportunities in the fast-paced technology environment - together.

We make all of our products in the state-of-the-art Teltonika IoT Group manufacturing facility in Vilnius, Lithuania. Full control over our production allows us to ensure that we deliver only the best and most reliable devices.



**6 MODERN  
SMT LINES**

**100+ ROBOTS FOR  
AUTOMATION**

**ECOFRIENDLY PACKAGING  
AND LASER ENGRAVING**

FROM CONCEPT TO THE FINISHED  
**PRODUCT**

## EXPERIENCE

For more than 24 years we have been providing reliable Industrial IoT & M2M connectivity solutions that are secure and easy to use.

## FLEXIBILITY

We have implemented hundreds of customized projects from the smallest firmware changes to full-scale hardware alterations.

## ALL IN ONE

From concept to the finished product - we develop everything in-house to ensure maximum quality and efficiency.



# PORTFOLIO

WE HELP YOU  
CONNECT

We designed our product portfolio to help our partners access opportunities within the rapidly growing IoT and Industrial IoT space. It consists of modems, gateways, routers, switches, and IoT platforms. We have grown to be one of the leaders of cellular IoT devices for industrial and professional applications. From automation, smart grid, to public transport connectivity – hundreds of thousands of our networking products are currently at the heart of our partners' solutions.

<b>GROWING PORTFOLIO</b>	<b>+2</b>	<b>+3</b>	<b>+5</b>	<b>+5</b>	<b>+5</b>	<b>+8</b>
	2017	2018	2019	2020	2021	2022 Q1-Q2

31 DEVICES - UNLIMITED USE CASES



## INDUSTRIAL & AUTOMATION

Global adoption of automation demands the ability to monitor and manage equipment remotely to increase productivity.



## ENERGY & UTILITIES

Reducing power consumption and maintenance costs by building wired and wireless IoT connectivity solutions.



## SMART CITY

Connected sensors, infrastructure, vehicles, and devices require secure and reliable IoT connectivity products.



## TRANSPORTATION

Networking devices transport operators to optimize their businesses and create new revenue streams.



## ENTERPRISE

Enterprise applications require primary and backup connectivity solutions that are secure, reliable, and easy to use.



## RETAIL

IoT connectivity solutions offer new ways to interact with clients and collect valuable data to make strategic decisions.

# OUR FOCUS

INSPIRE

At Teltonika Networks, we have a clearly defined product development philosophy which we use at every stage of product development decision-making. We know that security and reliability are the two core factors in industrial networking device selection. However, we thrive on offering complex and capable devices without sacrificing ease of use. We wish to make IoT accessible to every enthusiast and inspire creativity in solving real-life problems with technology.

## RELIABLE

We have long-standing experience manufacturing industrial devices that can withstand the most rigorous environments and offer connection continuity with multiple backup scenarios.

## SECURE

We assure the highest level of security for all Teltonika Networks products by performing regular safety tests and releasing periodical firmware updates to eliminate any risks of breaches.

## EASY TO USE

Industrial Teltonika Networks devices are designed mainly for professional applications, yet they are still easy to use. Offering products that do not require any special training is one of our strengths.

RUTOS

OPERATING SYSTEM FOR NETWORKING PRODUCTS

RutOS is our unified router operating system and the core component of all Teltonika Networks products. 10+ years of development made RutOS grow to the highest industry standards. Security, stability, and user experience are the key values that our platform is built around. Intuitive Web interface and constantly growing Wiki/Crowd-Support platforms help our partners cut costs on engineer training while implementing new devices or migrating from other systems.

Teltonika Networks products stand out as easily manageable devices on the market. Multiple remote monitoring and control functions are an inseparable part of RutOS. This Open-source OpenWrt-based operating system and complete software documentation enable easy development of custom software solutions or new functionality and fast integration with third-party platforms.

COMPLETE SOLUTION

# RMS

## REMOTE MANAGEMENT SYSTEM

RMS is a cloud-based IoT platform designed for intuitive and convenient remote monitoring, configuration, and control of compatible Teltonika Networks products and third-party devices. We offer four different services that allow for extensive management and advanced analytics. Choose a service that meets the needs of your current solution infrastructure and incorporate it into a familiar system environment using RMS API.

# RMS

## REMOTE MANAGEMENT SYSTEM

The Remote Management System (RMS) by Teltonika Networks allows you to control your whole connected IoT solution from anywhere in the world. RMS offers remote access to all devices from a single user-friendly platform. We tailored RMS to meet the requirements of various clients with four available RMS services.

### NO PUBLIC IP

Access your devices anywhere, without public IP

### SECURE

Protect your data with encrypted communication

### CUSTOMIZABLE

Adapt the interface and functionality to your needs

### EFFICIENT

Optimize time and resources with remote access

### TRY RMS FOR FREE

Explore the potential of any available RMS service with a [30-day trial!](#)



# MANAGEMENT

RMS MANAGEMENT enables complete control over your fleet of Teltonika Networks routers and gateways, assuring their security and availability. Enjoy the flexibility of remote configurations, monitoring, and updates of your connectivity device ecosystem even without a public IP!

- // MULTI-CONFIGURATION & FOTA
- // HISTORICAL DATA AND REPORTS
- // USER-FRIENDLY INTERFACE
- // TASK MANAGER FOR CUSTOM FUNCTIONS
- // 24/7 MONITORING AND ALARMS
- // LIMITED TIME THIRD-PARTY ACCESS

# CONNECT

RMS CONNECT is a unified access system that allows remotely reaching and controlling smart devices. If your PLC, Industrial PC, CCTV camera, POS system, or other intelligent device is reachable by one of the RMS-compatible routers or gateways, you can access it with RMS CONNECT.



Reach any device's WEB interface using HTTP(S)



No GUI, no problem! Access any device terminal via SSH or Telnet



Access remote PC, HMI, or any desktop with RDP and VNC protocols

# API

What could be more efficient than having a single software system for your whole connected solution infrastructure? RMS API allows your IoT Platform to directly interact with RMS and get all the needed functionality and data.

FAMILIAR INTERFACE

OPENAPI STANDARD

TESTING SANDBOX

DEVELOPER PORTAL

# VPN

Managing large-scale networks containing various devices can be tricky! RMS VPN offers the easiest way of setting up VPN connections to your whole infrastructure. Now you may remotely, simply, and securely reach multiple endpoints without configuring different protocols or setting up servers. We will take care of all this for you in the background!

// We use a top-trusted world-renowned OpenVPN protocol to establish secure connections with your devices.

// Use our on-demand service for an unlimited number of VPN clients. Pay only for the amount of data you use!

# CENTRALIZED REMOTE VENDING MACHINE POS SYSTEM MANAGEMENT



## RETAIL

Vending machines have been around for centuries. Their popularity is still on the rise for several reasons. First, they do not require any human presence and save time in fast-paced environments. Also, they offer 24/7 availability and do not need much space, hence lower upkeep costs.

### SOLUTION

Usually, vending machines use third-party cashless payment terminals. An essential element for these systems is having uninterrupted, secure internet connectivity. In this case, the RUT300 Ethernet router connects the POS, Linux PC, and various sensors to the network using five Gigabit Ethernet ports. TSW110 gateway enables connecting more sensors for a plug-n-play ecosystem expansion.


Another vital element in such solutions is remote management capability. Vending machine operators look after hundreds of machines in varied distanced locations. Due to stringent security policies, they require frequent firmware updates. Here RMS comes in to save the day of engineers and support specialists. Not only may they connect to Teltonika Networks routers for diagnostics, updates, and troubleshooting via RMS Management, but they can also reach

third-party devices, including the POS terminal, via RMS Connect to carry out whatever tasks they require.

To better illustrate the gain of RMS, let's multiply the number of vending machines by the hourly rate of an engineer and the fuel consumption needed to visit multiple remote locations. With RMS Connect, users can update thousands of POS terminals simultaneously from anywhere they are.

### BENEFITS

- /Remote management of Teltonika Networks devices via RMS Management for diagnostics, maintenance, and troubleshooting.
- /Remote accessibility of third-party devices via RMS Connect.
- /Real-time alerts to stay on top of your solution and prevent costly downtime.
- /Periodical or on-demand activity reports for optimization.
- /Compatible with various OS, including Linux, Windows, and Mac.
- /Hosted on AWS, RMS complies with rigorous security requirements and aligns with the latest cyber threat data.
- /Friendly payment plans: pay only for the services you need and the amount of data you use.

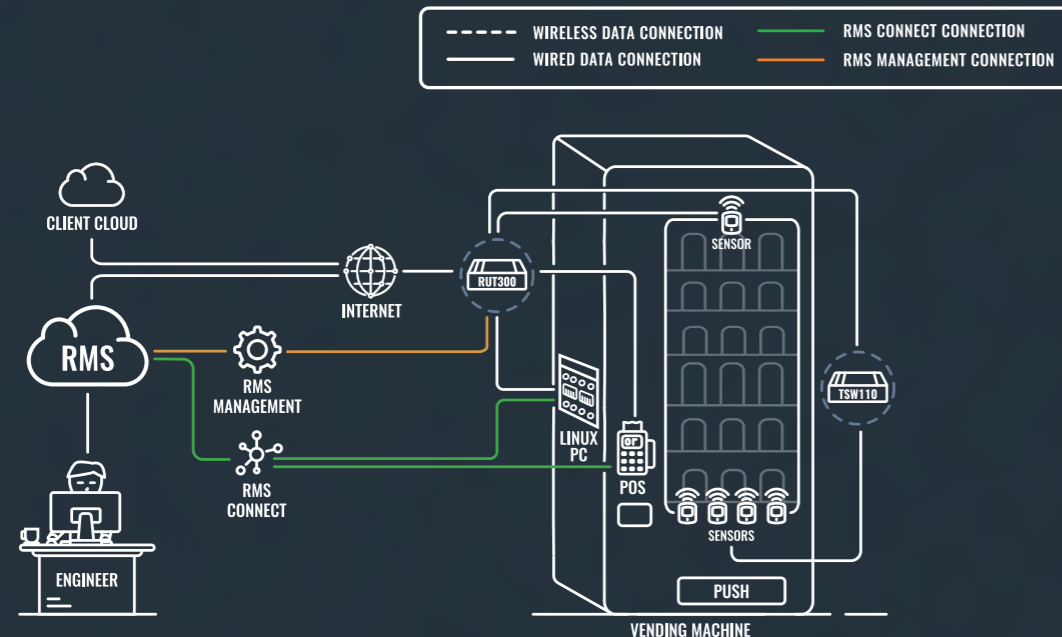

# REMOTE CALIBRATION AND CONTROL OF SMART TRAFFIC LIGHTS



## SMART CITY

One of the essential elements to combat heavy traffic is city planning. Our client received a project to install the first Microprocessor Optimized Vehicle Actuation and place it in one of the busiest roundabouts. Yet, the system had to be calibrated by a manufacturer expert. Thus, due to Covid-19 travel restrictions, meeting project delivery dates was a massive challenge.

### SOLUTION

Our client decided to redesign their solution by adding Teltonika Networks connectivity products to meet the deadlines. They chose to establish remote communication by using the RUT240 industrial cellular router so that the engineer could calibrate the system while staying abroad.

First, the RUT240 router provides an internet connection to this IoT solution. A traffic signal controller connects with the router via an Ethernet cable. Then the PLC can accommodate all of the traffic signals and sensor connections. The PLC can regulate traffic green light time with the data from induction loops installed on the tarmac.


Another part of this solution is the Teltonika Networks RMS. Teltonika RMS Management allows the RUT240 to monitor its temperature,

install firmware updates, or set up alerts. RMS Management can accommodate more compatible Teltonika Networks devices in the future without the need for public IPs.

On the other hand, the RMS Connect can access any other third-party equipment. With its help, you can then remotely manage any settings of the connected devices as if you were there physically. That is also how the engineer was able to calibrate the PLC remotely.

### BENEFITS

- /The RUT240 offers easy integration due to its 4G connectivity and small size.
- /RUT240 delivers high performance in rigorous environments, a perfect choice for solutions in extreme conditions, for example, near high traffic where you need resistance to vibrations. During the summer, the router's temperature had reached 78°C, and it still worked fine.
- /Teltonika RMS Connect allows access to any connected smart devices to configure them and extract data.
- /RMS Management allows access and control for all compatible Teltonika Networks devices without the need for a public IP.

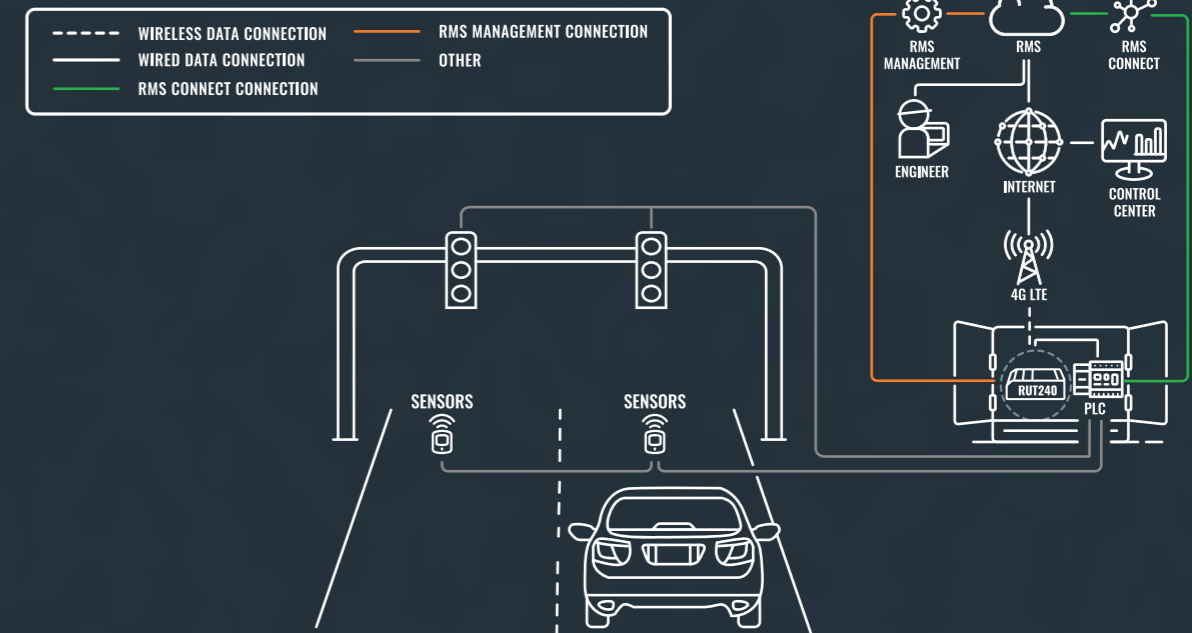



# CELLULAR

## MODEMS // GATEWAYS // ROUTERS

Teltonika Networks offers a wide array of cellular networking products to make your connectivity reliable, secure, and quickly deployable even in challenging scenarios. Our routers, modems, and gateways will help you build a solid IoT, M2M, or enterprise networking infrastructure, while advanced remote management capabilities will enable you to manage it with ease.

# TRM240

## INDUSTRIAL CELLULAR MODEM

TRM240 is an industrial-grade USB LTE Cat 1 modem with a rugged housing and an external antenna for better signal coverage. This product is perfect for upgrading existing industrial equipment with cost-efficient LTE connectivity.

### CONNECTIVITY

4G LTE (Cat 1), 3G, 2G

### COMPACT & DURABLE

Small size, easy installation

### USB

Interface for Internet access

### EXTERNAL ANTENNA

For deployment flexibility

## STANDARD PACKAGE CONTAINS:

TRM240 // 1 x LTE antenna (swivel, SMA male) // Micro-USB cable (0.8 m) // 1 x hex key // QSG (Quick Start Guide) // Packaging box

# HARDWARE



Mobile	4G/LTE (Cat 1), 3G, 2G
Powering option	microUSB, 5 VDC
SIM	1 x Internal SIM holder (2FF)
Antenna connectors	1 x SMA for mobile
USB	1 x Micro USB slave
Status LEDs	1 x LTE, 1 x Network, 1 x Power
Ingress protection rating	IP30
Operating humidity	10 % to 90 % non-condensing
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option
Dimensions (W x H x D)	74.5 x 25 x 64.5 mm
Weight	131 g

# SOFTWARE

Network manager	Windows 7/8/8.1/10 Linux distributions
USB serial driver	Windows 7/8/8.1/10 Windows CE 5.0/6.0 Linux 2.6~5.4 Android 4.x/5.x/6.x/7.x/8.x/9.x
RIL driver	Android 4.x/5.x/6.x/7.x/8.x/9.x
NDIS driver	Windows 7/8/8.1/10
Gobinet driver	Linux 2.6~5.4
QMI_WWAN driver	Linux 3.4~5.4
Control via AT commands	3GPP TS27.007 and enhanced AT commands

# TRM250

## INDUSTRIAL CELLULAR MODEM

TRM250 is an industrial-grade USB LTE Cat-M1/NB-IoT/EGPRS modem with a rugged housing and an external antenna for better signal coverage. This product is perfect for providing cost-efficient internet connectivity in remote monitoring applications.

### CONNECTIVITY

4G LTE (Cat M1), NB-IoT, 2G

### COMPACT & DURABLE

Small size, easy installation

### USB

Interface for Internet access

### EXTERNAL ANTENNA

For deployment flexibility

## STANDARD PACKAGE CONTAINS:

TRM250 // 1 x LTE antenna (swivel, SMA male) // Micro-USB cable (0.8 m) // 1 x hex key // QSG (Quick Start Guide) // Packaging box

# HARDWARE



Mobile	4G/LTE (Cat M1), NB-IoT, 2G
Powering option	microUSB, 5 VDC
SIM	1 x Internal SIM holder (2FF)
Antenna connectors	1 x SMA for mobile
USB	1 x Micro USB slave
Status LEDs	1 x Network, 1 x Power
Ingress protection rating	IP30
Operating humidity	10 % to 90 % non-condensing
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option
Dimensions (W x H x D)	74.5 x 25 x 64.5 mm
Weight	130 g

# SOFTWARE

Network manager	Windows 7/8/8.1/10 Linux distributions
USB serial driver	Windows 7/8/8.1/10 Windows CE 5.0/6.0 Linux 2.6~5.4 Android 4.x/5.x/6.x/7.x/8.x/9.x
RIL driver	Android 4.x/5.x/6.x/7.x/8.x/9.x
NDIS driver	Windows 7/8/8.1/10
Gobinet driver	Linux 2.6~5.4
QMI_WWAN driver	Linux 3.4~5.4
Control via AT commands	3GPP TS27.007 and enhanced AT commands



# TRB140

**INDUSTRIAL RUGGED LTE GATEWAY**

TRB140 is an ultra-small, lightweight, and energy-efficient IoT device with mission-critical LTE Cat 4 and Gigabit Ethernet connectivity options. Linux environment offers a high degree of customization. This gateway is perfect for projects and applications where a single device must be upgraded with reliable and secure internet connectivity.

**CONNECTIVITY**

4G LTE (Cat 4), 3G, 2G

**COMPACTNESS**

Small and rugged aluminum housing for easy installation

**PROTOCOLS**

Compatible with industrial DNP3 & Modbus communication protocols

**RMS**

For remote management, access & VPN services

**STANDARD PACKAGE CONTAINS:**

TRB140 // 9 W PSU // 1 x LTE antenna (magnetic mount, SMA male, 3 m cable) // Micro-USB cable (0.8 m) // 1 x hex key // LAN cable // RMS Flyer // QSG (Quick Start Guide) // Packaging box

# HARDWARE

Mobile	4G/LTE (Cat 4), 3G, 2G
CPU	Qualcomm, ARM Cortex A7, 1.2 GHz
Storage	512 MBytes Flash (200 MBytes for userspace)
Memory	128 MBytes RAM (50 MBytes for userspace)
Powering option	4pin power socket, 9-30 VDC
SIM	1 x Internal SIM holder (2FF)
Antenna connectors	1 x SMA for mobile
Ethernet	1 x 10/100/1000 Ethernet port
Inputs/Outputs	On 4pin socket: 2 x Digital input/Digital open collector output (configurable)
Other	1 x Micro USB slave
Status LEDs	3 x Connection type, 5 x Signal strength, 2 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option
Dimensions (W x H x D)	74.5 x 25 x 64.4 mm
Weight	134 g

# SOFTWARE

Operating system	RutOS
Mobile features	Auto APN, Band lock, Operator black/white list, Data/SMS limits
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Firewall	Port forward, Traffic rules, Custom rules, Pre-configured firewall rules, NAT, NAT-T, NAT helpers, Unlimited firewall configuration via CLI
Security	DDOS prevention (SYN flood protection, SSH attack prevention, HTTP/HTTPS attack prevention), Port scan prevention (SYN-FIN, SYN-RST, X-mas, NULL flags, FIN scan attacks)
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, SSTP, Stunnel, DMVPN L2TP, ZeroTier, WireGuard
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
SMS features	SMS status, SMS configuration, Send/Read SMS via HTTP POST/GET, EMAIL to SMS, SMS to Email, SMS to HTTP, SMS to SMS, scheduled SMS, SMS autoreply, SMPP
Services	WEB UI, CLI, SSH, SMS, TR-069, SNMP, JSON-RPC, MQTT, RMS

# TRB141

## INDUSTRIAL RUGGED GPIO LTE GATEWAY

TRB141 is a small industrial LTE Cat 1 gateway equipped with diverse inputs/outputs and a Micro USB port. This gateway comes with secure, highly customizable RutOS and works perfectly for remote management of devices and applications using I/O.

### CONNECTIVITY

4G LTE (Cat 1), 3G, 2G

### COMPACTNESS

Small and rugged aluminum housing for easy installation

### I/O

Wide range of Inputs/Outputs for remote monitoring and control

### PROTOCOLS

Compatible with industrial DNP3 & Modbus communication protocols

### STANDARD PACKAGE CONTAINS:

TRB141 // 9 W PSU // 1 x LTE antenna (magnetic mount, SMA male, 3 m cable) // Micro-USB cable (0.8 m) // 1 x hex key // I/O connector // RMS Flyer // QSG (Quick Start Guide) // Packaging box

# HARDWARE



Mobile	4G/LTE (Cat 1), 3G, 2G
CPU	Qualcomm, ARM Cortex A7, 1.2 GHz
Storage	512 MBytes Flash (200 MBytes for userspace)
Memory	128 MBytes RAM (50 MBytes for userspace)
Powering option	4pin power socket, 9-30 VDC
SIM	1 x Internal SIM holder (2FF)
Antenna connectors	1 x SMA for mobile
Inputs/Outputs	On 4pin socket: 2 x Digital input/Digital open collector output (configurable) On 16pin socket: 1 x Isolated input, 1 x Single wire input, 1 x Analog input (with 4-20mA capability), 1 x Latching relay output, 1 x Non-latching relay output, 2 x Dry/Wet input (configurable)
Other	1 x Micro USB slave
Status LEDs	3 x Connection type, 5 x Signal strength, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option
Dimensions (W x H x D)	74.5 x 25 x 64.4 mm
Weight	136 g

# SOFTWARE

Operating system	RutOS
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, SSTP, Stunnel, DMVPN L2TP, ZeroTier, WireGuard
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Services	DDNS, WEB filter, Traffic Logging

# TRB142

## INDUSTRIAL RUGGED LTE RS232 GATEWAY

TRB142 is an ultra-small, lightweight, and energy-efficient IoT gateway equipped with mission-critical LTE connectivity. TRB142 comes with a widely used RS232 interface for remote management of industrial devices.

### CONNECTIVITY

4G LTE (Cat 1), 3G, 2G

### COMPACTNESS

Small and rugged aluminum housing for easy installation

### RS232

Equipped with RS232 for industrial serial communication

### PROTOCOLS

Compatible with industrial DNP3 & Modbus communication protocols

### STANDARD PACKAGE CONTAINS:

TRB142 // 9 W PSU // 1 x LTE antenna (magnetic mount, SMA male, 3 m cable) // Micro-USB cable (0.8 m) // 1 x hex key // RMS Flyer // QSG (Quick Start Guide) // Packaging box

## HARDWARE



Mobile	4G/LTE (Cat 1), 3G, 2G
CPU	Qualcomm, ARM Cortex A7, 1.2 GHz
Storage	512 MBytes Flash (200 MBytes for userspace)
Memory	128 MBytes RAM (50 MBytes for userspace)
Powering option	4pin power socket, 9-30 VDC
SIM	1 x Internal SIM holder (2FF)
Antenna connectors	1 x SMA for mobile
Inputs/Outputs	On 4pin socket: 2 x Digital input/Digital open collector output (configurable)
Serial	1 x RS232
Other	1 x Micro USB slave
Status LEDs	3 x Connection type, 5 x Signal strength, 1 x Power
Operating temperature	-40° C to 75° C
Housing	Aluminium housing with DIN rail mounting option
Dimensions (W x H x D)	74.5 x 25 x 64.4 mm
Weight	135 g

## SOFTWARE

Operating system	RutOS
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Modbus	TCP slave, TCP master, RTU master, RTU gateway, Modbus over MQTT
Serial	Console, Over IP, Modem, NTRIP, Modbus



# TRB143

**M-BUS CELLULAR GATEWAY**

With an integrated M-Bus interface, the TRB143 industrial gateway was engineered explicitly for telemetry and utility-monitoring applications. Cellular and wired connectivity enhance the telemetry process by ensuring the data transferring of meter readings

**M-BUS INTERFACE**

Supporting up to 250 slave devices

**CONNECTIVITY**

4G/LTE (Cat 4), 3G, 2G

**COMPACT**

Easy, simple integration

**RMS**

Compatible with Teltonika Networks Remote Management System

**STANDARD PACKAGE CONTAINS:**

TRB143 // 18 W PSU // 1 x LTE antenna (magnetic mount, SMA male, 3 m cable) // 1 x hex key // 1 x LAN cable // QSG (Quick Start Guide) // Packaging box

# HARDWARE



Mobile	4G (LTE) – Cat 4 up to 150 Mbps, 3G – Up to 42 Mbps, 2G – Up to 236.8 kbps
CPU	ARM Cortex-A7 1.3 GHz CPU
Storage	512 MB (200 MB available for userspace)
RAM	256 MB (160 MB available for userspace)
Powering option	4-pin power socket, 12 – 30 VDC
SIM	1 x SIM slot (Mini SIM – 2FF), 1.8 V/3 V
Ethernet	1 x RJ45 port, 10/100/1000 Mbps
Inputs/Outputs	2 x Configurable I/O pins on 4-pin power connector
M-Bus	1 x M-Bus Interface
M-Bus interface	The M-Bus interface can support up to 250 slave devices and can power up to 6 slave devices
Status LEDs	3 x connection type status LEDs, 3 x connection strength LEDs, 2 x LAN status LEDs, 1 x Power LED
Operating temperature	-40 °C to 75 °C
Housing	Aluminum housing
Dimensions (W x H x D)	74.5 x 25 x 64.4 mm
Weight	145 g

# SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, SMTP, SSL v3, TLS, PPP, PPPoE, SSH, DHCP, SNMP, MQTT, Wake on LAN (WOL)
Monitoring and Management	WEB UI, FOTA, SSH, SMS, Call, TR-069, MQTT, SNMP, JSON-RPC, Modbus, RMS
Network features	Routing, Connection monitoring, Firewall, DHCP, QoS / Smart Queue Management (SQM), DDNS, SSHFS
VPN and tunneling	OpenVPN, GRE, IPsec, PPTP, L2TP, SSTP, Stunnel, DMVPN, WireGuard, ZeroTier
Connection monitoring	Ping Reboot, Wget Reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, Clouds of things, ThingWorx, Cumulocity, Azure IoT Hub



# TRB145

**INDUSTRIAL RUGGED LTE RS485 GATEWAY**

TRB145 is an ultra-small, lightweight, and energy-efficient IoT gateway equipped with mission-critical LTE connectivity that comes with a widely used RS485 interface for remote management of industrial equipment.

**CONNECTIVITY**

4G LTE (Cat 1), 3G, 2G

**COMPACTNESS**

Small and rugged aluminum housing for easy installation

**RS485**

Equipped with RS485 for industrial serial communication

**PROTOCOLS**

Compatible with industrial DNP3 & Modbus communication protocols

**STANDARD PACKAGE CONTAINS:**

TRB145 // 9 W PSU // 1 x LTE antenna (magnetic mount, SMA male, 3 m cable) // Micro-USB cable (0.8 m) // 1 x hex key // RS485 connector // RMS Flyer // QSG (Quick Start Guide) // Packaging box

# HARDWARE

Mobile	4G/LTE (Cat 1), 3G, 2G
CPU	Qualcomm, ARM Cortex A7, 1.2 GHz
Storage	512 MBytes Flash (200 MBytes for userspace)
Memory	128 MBytes RAM (50 MBytes for userspace)
Powering option	4pin power socket, 9-30 VDC
SIM	1 x Internal SIM holder (2FF)
Antenna connectors	1 x SMA for mobile
Inputs/Outputs	On 4pin socket: 2 x Digital input/Digital open collector output (configurable)
Serial	1 x RS485
Other	1 x Micro USB slave
Status LEDs	3 x Connection type, 5 x Signal strength, 1 x Power
Operating temperature	-40° C to 75° C
Housing	Aluminium housing with DIN rail mounting option
Dimensions (W x H x D)	74.5 x 25 x 64.4 mm
Weight	130 g

# SOFTWARE

Operating system	RutOS
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Modbus	TCP slave, TCP master, RTU master, RTU gateway, Modbus over MQTT
Serial	Console, Over IP, Modem, NTRIP, Modbus





# TRB245

## INDUSTRIAL M2M LTE GATEWAY

TRB245 is an industrial all-in-one M2M LTE Cat 4 gateway equipped with multiple inputs/outputs, RS232, RS485, and Ethernet interfaces, allowing for universal application in M2M solutions.

### CONNECTIVITY

4G LTE (Cat 4), 3G, 2G

### DUAL SIM

With auto failover, backup WAN and other switching scenarios

### SERIAL PORTS

Equipped with RS232/RS485 serial communication interfaces

### I/O

Multiple Inputs and Outputs for remote monitoring and control

### STANDARD PACKAGE CONTAINS:

TRB245 // 9 W PSU // 1 x LTE antenna (swivel, SMA male) // 1 x GNSS antenna (adhesive, SMA male, 3 m cable) // 16 pin terminal block // 1 x hex key // RMS Flyer // QSG (Quick Start Guide) // Packaging box

# HARDWARE



Mobile	4G/LTE (Cat 4), 3G, 2G
CPU	Qualcomm, MIPS 24Kc, 650 MHz
Storage	16 MB Flash
Memory	64 MB RAM
Powering option	16pin terminal, 9-30 VDC
SIM	2 x Internal SIM holders (2FF)
Antenna connectors	1 x SMA for mobile, 1 x SMA for GPS
Ethernet	1 x 10/100 Ethernet port
GNSS	GPS, GLONASS, BeiDou, Galileo, QZSS
Inputs/Outputs	On 16pin socket: 3 x Digital input/Digital open collector output (configurable), 1 x Analog input
Serial	1 x RS232, 1 x RS485
Status LEDs	3 x Connection type, 3 x Signal strength, 2 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option
Dimensions (W x H x D)	83 x 25 x 74.2 mm
Weight	165 g

# SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Multiple PDN, Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
NTP	NTP Server, NTP Client, Sync with: External NTP server, GNSS, Mobile operator
GNSS	NMEA forwarding, AVL, Geofencing
Modbus	TCP slave, TCP master, RTU master, RTU gateway, Modbus over MQTT
Serial	Console, Over IP, Modem, NTRIP, Modbus
Administration	Multi user, Configuration profiles, Diagnostics, logs, Configuration backup



# TRB255

**INDUSTRIAL M2M GATEWAY**

Industrial all-in-one M2M LTE Cat-M1/NB-IoT/EGPRS gateway, equipped with multiple inputs/outputs, RS232, RS485, and Ethernet interfaces to be used universally in various M2M applications.

**CONNECTIVITY**

4G LTE (Cat M1), NB-IoT, 2G

**DUAL SIM**

With auto failover, backup WAN and other switching scenarios

**SERIAL PORTS**

Equipped with RS232/RS485 serial communication interfaces

**I/O**

Multiple Inputs and Outputs for remote monitoring and control

**STANDARD PACKAGE CONTAINS:**

TRB255 // 9 W PSU // 1 x LTE antenna (swivel, SMA male) // 1 x GNSS antenna (adhesive, SMA male, 3 m cable) // Ethernet cable (1.5 m) // 1 x hex key // RMS Flyer // QSG (Quick Start Guide) // Packaging box

# HARDWARE



Mobile	4G/LTE (Cat M1), NB-IoT, 2G
CPU	Qualcomm, MIPS 24Kc, 650 MHz
Storage	16 MB Flash
Memory	64 MB RAM
Powering option	16pin terminal, 9-30 VDC
SIM	2 x Internal SIM holders (2FF)
Antenna connectors	1 x SMA for mobile, 1 x SMA for GPS
Ethernet	1 x 10/100 Ethernet port
GNSS	GPS, GLONASS, BeiDou, Galileo, QZSS
Inputs/Outputs	On 16pin socket: 3 x Digital input/Digital open collector output (configurable), 1 x Analog input
Serial	1 x RS232, 1 x RS485
Status LEDs	3 x Connection type, 3 x Signal strength, 2 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option
Dimensions (W x H x D)	83 x 25 x 74.2 mm
Weight	165 g

# SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Multiple PDN, Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
NTP	NTP Server, NTP Client, Sync with: External NTP server, GNSS, Mobile operator
GNSS	NMEA forwarding, AVL, Geofencing
Modbus	TCP slave, TCP master, RTU master, RTU gateway, Modbus over MQTT
Serial	Console, Over IP, Modem, NTRIP, Modbus
Administration	Multi user, Configuration profiles, Diagnostics, logs, Configuration backup

# TRB500

**INDUSTRIAL 5G GATEWAY**

TRB500 is a compact, energy-efficient 5G gateway for ultra-fast data transmission with ultra-low latency. Backward compatibility with 4G and 3G networks enables future-proofing solution infrastructures even in areas where 5G is not yet available.

**5G**

Ultra-high cellular speeds of up to 1 Gbps

**SA & NSA**

Supports both architectures to leverage the 5G infrastructure

**COMPACTNESS**

One of the smallest 5G gateways available in the market

**FUTURE-PROOFING**

Backward compatible with 4G (LTE CAT 20) and 3G network technologies

**STANDARD PACKAGE CONTAINS:**

TRB500 Gateway // 9 W PSU // 4 x Mobile antennas (swivel, SMA male) // Micro-USB cable (0.8 m) // Ethernet cable // SIM Adapter kit // QSG (Quick Start Guide) // Packaging box

# HARDWARE



Mobile	5G Sub-6Ghz SA/NSA 2.1/3.3Gbps DL (4x4 MIMO), 900/600 Mbps UL (2x2); 4G (LTE) – LTE Cat 20 2.0Gbps DL, 200Mbps UL; 3G – 42 Mbps DL, 5.76Mbps UL
CPU	Single core ARM Cortex A7, 1,5 GHz
Storage	512 MB Flash
Memory	256 MB RAM
Powering option	4-pin power socket, 9-30 VDC
SIM	1 x Internal SIM holder (2FF)
Antenna connectors	4 x SMA for mobile
Ethernet	1 x 10/100/1000 Mbps Ethernet port
Inputs/Outputs	On 4-pin socket: 1 x Digital input, 1 x Digital open collector output (configurable)
Other	1 x Micro USB slave, 1 x Grounding screw
Status LEDs	3 x Connection type s, 3 x Signal strength, 2 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminum housing, DIN rail mounting option
Dimensions (W x H x D)	100 x 30 x 93.4 mm
Weight	241g

# SOFTWARE

Operating system	RutOS
Mobile features	Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, SMTP, SSL v3, TLS, PPP, PPPoE, SSH, DHCP, SNMP, MQTT, Wake on LAN (WOL)
Firewall	Port forward, traffic rules, custom rules, Pre-configured firewall rules can be enabled via the WebUI, unlimited firewall configuration via CLI; NAT; NAT-T
Security	DDOS prevention (SYN flood protection, SSH attack prevention, HTTP/HTTPS attack prevention), port scan prevention (SYN-FIN, SYN-RST, X-mas, NULL flags, FIN scan attacks)
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, SSTP, STUNNEL, DMVPN, WireGuard, ZeroTier
Monitoring and Management	WEB UI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget Reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
SMS features	SMS status, SMS configuration, send/read SMS via HTTP POST/GET, EMAIL to SMS, SMS to EMAIL, SMS to HTTP, SMS to SMS, scheduled SMS, SMS autoreply
Services	WEB UI , FOTA, SSH, SMS, Call, TR-069, MQTT, SNMP, JSON-RPC, MODBUS

# MANUFACTURING FACILITY REMOTE MANAGEMENT



// INDUSTRIAL & AUTOMATION

In 2020 there were more than 290 thousand manufacturing plants in the US alone. This number is bound to keep increasing as the world industry is ever-growing in size. Such industrial expansion can be hard to keep up with as hiring and training new personnel takes time. With the increase in the efficiency of their factories, companies resort to manufacturing and assembly line automation.

## SOLUTION

Does the fact that one device from Teltonika Networks can connect a PLC, HMI, RFID, panic alert button and more intrigue you? That little device is the TRB255 industrial M2M gateway. First of all, this gateway can communicate with various devices responsible for working on the manufacturing line thanks to multiple interface ports.

For the primary connections — PLC can be connected via the RS232 serial communication interface, while HMI can take up the RS485. This setup takes care of the central production line machinery. The Ethernet connects the HVAC (Heating, Ventilation and Conditioning) system, which can be adjusted based on the temperature and humidity sensors' data, connecting to TRB255 through the analog input.

Teltonika industrial gateway can also accommodate all the other supporting systems thanks to its multiple differing connections. Such

design can incorporate older components of the assembly line into one system. For example, a panic alert button can connect to one of the digital input/output ports, and another port can accommodate an RFID reader to ensure additional factory security.

While the TRB225 industrial gateway provides a way to incorporate all devices into one network, Teltonika Networks RMS (Remote Management System) lets you access all of it remotely. This setup enables you to reach our products and third-party equipment as if you were there physically and perform troubleshooting, update firmware, and change any settings.

## BENEFITS


/Backward compatibility with the 2G network allows for installation in facilities using legacy equipment.

/The supported power supply voltages range from 9 to 30V, allowing easy integration with industrial components.

/Dual-SIM offers automatic failover in case the cellular network connection gets disrupted.

/TRB255 offers multiple interfaces, including RS232 and RS485, letting you connect old and new equipment in the same network.

/This router is compatible with the Teltonika RMS, which allows you to gather data and manage your Teltonika devices remotely.

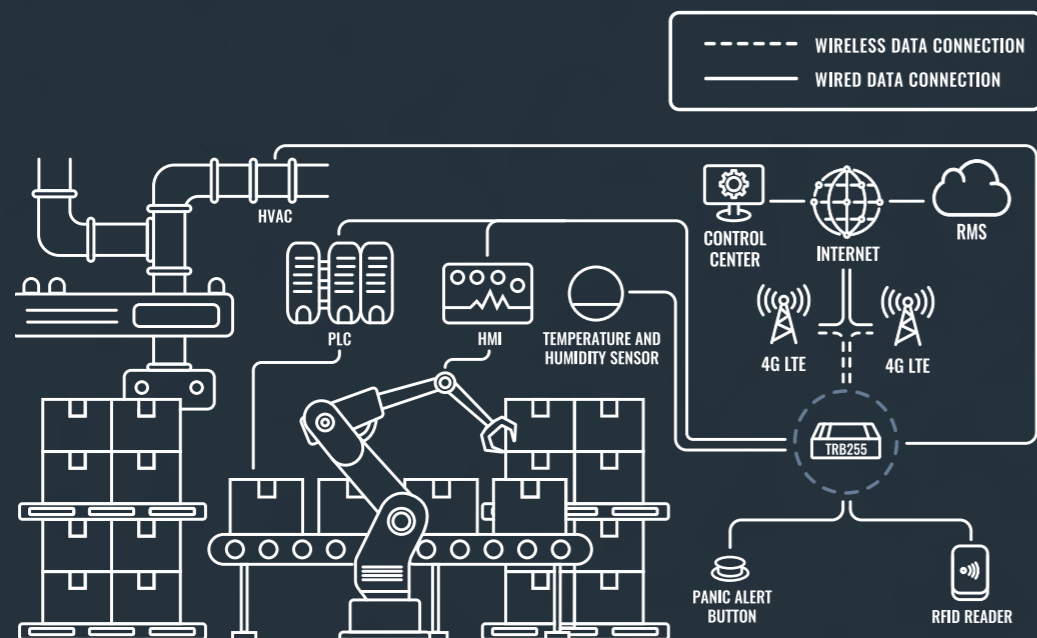

# WIRELESS PARKING AVAILABILITY DATA TRANSMISSION



// SMART CITY

Due to the high volume of cars on the streets, up to 30% of traffic comprises daily commuters. They are wondering about trying to find a free parking spot. People looking for parking pollute the environment with car exhaust fumes. So, is there a way to address this issue and reduce adverse effects?

## SOLUTION

Our partners created a system to display available parking spaces. This urban IoT solution already helps solve Belgrade traffic congestion, exhaust fume pollution, and noise issues.

Sensors in each parking spot are connected to a communication unit. They collect all the information about parking availability and send it to a cloud server. The display board is installed farther from the sensors, so they opted for a 4G cellular connection provided by Teltonika Networks industrial TRB145 LTE gateway installed within the display housing. TRB145 retrieves the information from

the server and passes on the parking space availability data to the display via the RS485 serial interface. The TRB145 gateway design is compact enough to fit inside the display board. Also, TRB145 runs on the open-source operating system — RutOS, allowing for seamless integration with other systems and customization according to the existing infrastructure.


## BENEFITS

/TRB145 has a sturdy aluminum housing that resists vibrations near heavy and constant traffic.

/TRB145 has a compact design, perfect for the fast and easy deployment of urban IoT solutions and tight spaces.

/Multiple software features like Firewall, Open VPN, and more, TRB145 for applications where security plays an important role.

/TRB145 provides stable 4G LTE cellular connectivity where a wired connection isn't an option.

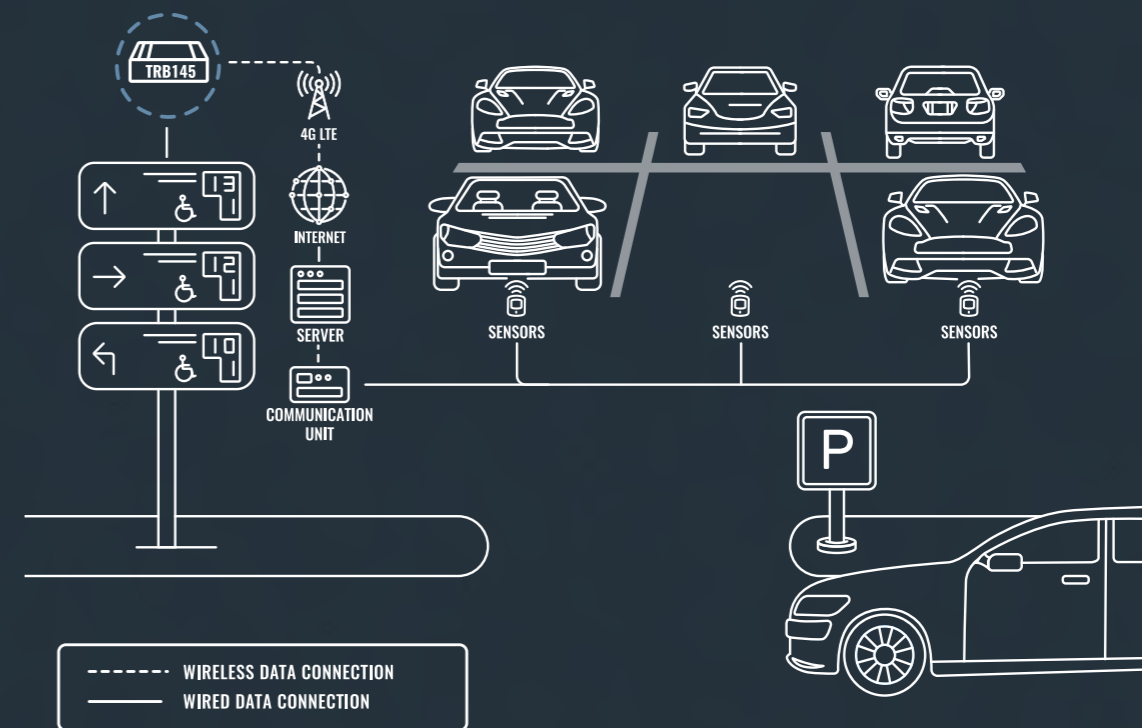

# RUT200

**INDUSTRIAL CELLULAR ROUTER**

RUT200 is a compact-sized industrial cellular router compatible with the Middle East, Asia, Africa, South America, and CIS networks. Featuring multiple connectivity options (LTE, Wi-Fi, and Ethernet), this model is perfect for quickly setting up primary and backup connectivity with remote management capabilities.

**CONNECTIVITY**

4G LTE (Cat 4), 3G, 2G

**WI-FI**

Wireless Access Point with Hotspot functionality

**WAN FAILOVER**

Automatic switching to available Backup connection

**RMS**

For remote management, access & VPN services

**STANDARD PACKAGE CONTAINS:**

RUT200 // 9 W PSU // 2 x LTE antennas (swivel, SMA male) // 1 x WiFi antenna (swivel, RP-SMA male) // RMS Flyer // QSG (Quick Start Guide) // Packaging box

## HARDWARE



Mobile	4G/LTE (Cat 4), 3G, 2G
CPU	Mediatek MIPS 24Kc 580 MHz
Storage	16 MB Flash
Memory	128 MB RAM
Powering option	4pin power socket, 9-30 VDC
SIM	1 x External SIM holder (2FF)
Antenna connectors	2 x SMA for mobile, 1 x RP-SMA for WiFi
Ethernet	2 x 10/100 Ethernet ports: 1 x WAN (configurable as LAN), 1 x LAN
WiFi	IEEE 802.11b/g/n, Access point (AP), Station (STA)
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output
Status LEDs	3 x Connection type, 5 x Signal strength, 2 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option, plastic panels
Dimensions (W x H x D)	83 x 25 x 74 mm
Weight	125 g

## SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Auto APN, Band lock
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Security	DDOS prevention (SYN flood protection, SSH attack prevention, HTTP/HTTPS attack prevention), Port scan prevention (SYN-FIN, SYN-RST, X-mas, NULL flags, FIN scan attacks)
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, ZeroTier, WireGuard
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
SMS features	SMS status, SMS configuration, Send/Read SMS via HTTP POST/GET, EMAIL to SMS, SMS to Email, SMS to HTTP, SMS to SMS, scheduled SMS, SMS autoreply, SMPP
Services	DDNS, VRRP, Wake On Lan (WOL), WEB filter, UPNP, Traffic Logging

# RUT240

## INDUSTRIAL CELLULAR ROUTER

Compact, robust and powerful device tailored for industrial M2M/IoT applications. RUT240 features two Ethernet ports and a wireless interface with Hotspot functionality. Stable connectivity is ensured with WAN failover, while the RutOS software meets the highest security standards. Compatible with RMS.

### CONNECTIVITY

4G LTE (Cat 4), 3G, 2G

### WI-FI

Wireless Access Point with Hotspot functionality

### WAN FAILOVER

Automatic switching to available Backup connection

### RMS

For remote management, access & VPN services

### STANDARD PACKAGE CONTAINS:

RUT240 // 9 W PSU // 2 x LTE antennas (swivel, SMA male) // 1 x WiFi antenna (swivel, RP-SMA male) // Ethernet cable (1.5 m) // SIM Adapter kit // RMS Flyer // QSG (Quick Start Guide) // Packaging box

# HARDWARE



Mobile	4G/LTE (Cat 4), 3G, 2G
CPU	Atheros, MIPS 24Kc, 400 MHz
Storage	16 MB Flash
Memory	64 MB RAM
Powering option	4pin power socket, 9-30 VDC
SIM	1 x External SIM holder (2FF)
Antenna connectors	2 x SMA for mobile, 1 x RP-SMA for WiFi
Ethernet	2 x 10/100 Ethernet ports: 1 x WAN (configurable as LAN), 1 x LAN
WiFi	IEEE 802.11b/g/n, Access point (AP), Station (STA)
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output
Status LEDs	3 x Connection type, 5 x Signal strength, 2 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option, plastic panels
Dimensions (W x H x D)	83 x 25 x 74 mm
Weight	125 g

# SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Auto APN, Band lock
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Security	DDOS prevention (SYN flood protection, SSH attack prevention, HTTP/HTTPS attack prevention), Port scan prevention (SYN-FIN, SYN-RST, X-mas, NULL flags, FIN scan attacks)
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, ZeroTier, WireGuard
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
SMS features	SMS status, SMS configuration, Send/Read SMS via HTTP POST/GET, EMAIL to SMS, SMS to Email, SMS to HTTP, SMS to SMS, scheduled SMS, SMS autoreply, SMPP
Services	DDNS, VRRP, Wake On Lan (WOL), WEB filter, UPNP, Traffic Logging

# RUT241

## INDUSTRIAL CELLULAR ROUTER

Equipped with 4G LTE, Wi-Fi, and two Ethernet ports, RUT241 offers unstoppable connection continuity with automatic WAN failover. Industrial design, compact size, multiple connection interfaces, and compatibility with RMS make this device an excellent fit in numerous IoT and M2M solutions.

### CONNECTIVITY

4G LTE (Cat 4), 3G, 2G

### WI-FI

Wireless Access Point with Hotspot functionality

### WAN FAILOVER

Automatic switching to available Backup connection

### RMS

For remote management, access & VPN services

### STANDARD PACKAGE CONTAINS:

RUT241 // 9 W PSU // 2 x LTE antennas (swivel, SMA male) // 1 x WiFi antenna (swivel, RP-SMA male) // Ethernet cable (1.5 m) // SIM Adapter kit // RMS Flyer // QSG (Quick Start Guide) // Packaging box

## HARDWARE



Mobile	4G/LTE (Cat 4), 3G, 2G
CPU	Mediatek MIPS 24Kc 580 MHz
Storage	16 MB Flash
Memory	128 MB RAM
Powering option	4pin power socket, 9-30 VDC
SIM	1 x External SIM holder (2FF)
Antenna connectors	2 x SMA for mobile, 1 x RP-SMA for WiFi
Ethernet	2 x 10/100 Ethernet ports: 1 x WAN (configurable as LAN), 1 x LAN
WiFi	IEEE 802.11b/g/n, Access point (AP), Station (STA)
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output
Status LEDs	3 x Connection type, 5 x Signal strength, 2 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option, plastic panels
Dimensions (W x H x D)	83 x 25 x 74 mm
Weight	125 g

## SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Auto APN, Band lock
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Security	DDOS prevention (SYN flood protection, SSH attack prevention, HTTP/HTTPS attack prevention), Port scan prevention (SYN-FIN, SYN-RST, X-mas, NULL flags, FIN scan attacks)
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, ZeroTier, WireGuard
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
SMS features	SMS status, SMS configuration, Send/Read SMS via HTTP POST/GET, EMAIL to SMS, SMS to Email, SMS to HTTP, SMS to SMS, scheduled SMS, SMS autoreply, SMPP
Services	DDNS, VRRP, Wake On Lan (WOL), WEB filter, UPNP, Traffic Logging

# RUT360

**LTE CAT6 INDUSTRIAL CELLULAR ROUTER**

A successor of our best-selling RUT240, RUT360 keeps its compact shape in a rugged aluminum housing but offers more processing power and increased cellular speeds up to 300Mbps with Carrier Aggregation. Unique programming, remote monitoring, and security features make RUT360 perfect for IoT and M2M applications, where secure connectivity is required, but mobile data speeds are limited.

**4G LTE CAT 6**

Cellular speeds up to 300Mbps with Carrier Aggregation

**WI-FI**

802.11 b/g/n Wireless Access Point with Hotspot functionality

**WAN FAILOVER**


Automatic switching to available Backup connection

**RMS**

For remote management, access & VPN services

**STANDARD PACKAGE CONTAINS:**

RUT360 // 12 W PSU // 2 x LTE antennas (swivel, SMA male) // 2 x WiFi antennas (swivel, RP-SMA male) // Ethernet cable (1.5 m) // SIM Adapter kit // RMS Flyer // QSG (Quick Start Guide) // Packaging box

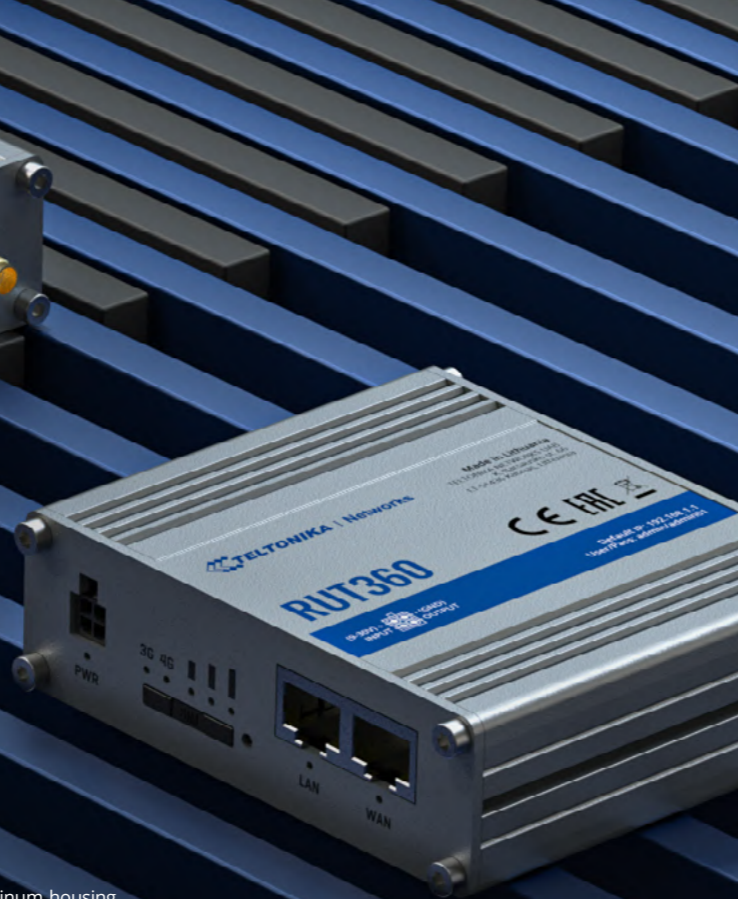

## HARDWARE



Mobile	4G/LTE (Cat 6), 3G
CPU	Qualcomm, MIPS 24Kc, 650 MHz
Memory	16 MBytes Flash, 128 MBytes RAM
Powering option	4pin power socket, 9-30 VDC
SIM	1 x External SIM holder (2FF)
Antenna connectors	2 x SMA for mobile, 2 x RP-SMA for WiFi
Ethernet	2 x 10/100 Ethernet ports: 1 x WAN (configurable as LAN), 1 x LAN
WiFi	IEEE 802.11b/g/n, Access point (AP), Station (STA)
Inputs/Outputs	On 4pin socket: 2 x Digital input/Digital open collector output (configurable)
Status LEDs	2 x Connection type, 3 x Signal strength, 2 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option
Dimensions (W x H x D)	100 x 30 x 85 mm
Weight	247 g

## SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Auto APN, Band lock
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Security	DDOS prevention (SYN flood protection, SSH attack prevention, HTTP/HTTPS attack prevention), Port scan prevention (SYN-FIN, SYN-RST, X-mas, NULL flags, FIN scan attacks)
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, ZeroTier, WireGuard
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
SMS features	SMS status, SMS configuration, Send/Read SMS via HTTP POST/GET, EMAIL to SMS, SMS to Email, SMS to HTTP, SMS to SMS, scheduled SMS, SMS autoreply
Services	DDNS, VRRP, Wake On Lan (WOL), WEB filter, UPNP, Traffic Logging



# RUT901

## INDUSTRIAL CELLULAR ROUTER

The RUT901 cellular router delivers the top-rated features of its predecessors, the RUT950 and RUT951, to the market. The RUT901 is dedicated to professional industrial use cases with its high customization possibilities, security features, industrial protocols, and compatibility with Teltonika Networks' Remote Management System (RMS).

### CONNECTIVITY

4G LTE (Cat 4), 3G, 2G

### DUAL SIM

With auto failover, backup WAN and other switching scenarios

### WI-FI

Wireless Access Point with Hotspot functionality

### PROTOCOLS

Multiple protocols supported including MQTT, Modbus TCP, DNP3

### STANDARD PACKAGE CONTAINS:

RUT901 // 9 W PSU // 2 x LTE antennas (swivel, SMA male) // 2 x WiFi antennas (swivel, RP-SMA male) // Ethernet cable (1.5 m) // SIM Adapter kit // QSG (Quick Start Guide) // Packaging box

# HARDWARE



Mobile	4G (LTE) – Cat 4 up to 150 Mbps, 3G – Up to 21 Mbps, 2G – Up to 236.8 kbps
CPU	MediaTek, MIPS 24KEc, 580MHz
Storage	16 MB, SPI Flash
Memory	128 MB, DDR2
Powering option	4-pin power socket, 9-30 VDC
SIM	2 x SIM slots (Mini SIM - 2FF), 1.8 V/3 V, external SIM holders, eSIM (Optional)
Antenna connectors	2 x SMA female for LTE, 2 x RP-SMA female for WiFi antenna connectors
Ethernet	4 x RJ45 ports, 10/100 Mbps
WiFi	IEEE 802.11b/g/n, Access Point (AP), Station (STA)
Inputs/Outputs	1 x Digital Input, 1 x Digital Output on 4-pin power connector
Status LEDs	1 x bi-color connection status LED, 5 x connection strength LEDs, 4 x LAN status LEDs, 1 x Power LED
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing, plastic panels
Dimensions (W x H x D)	110 x 50 x 100 mm
Weight	297 g

# SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	SIM switch, Status, SMS, Black/White list, Band management, APN, Bridge, Passthrough
Network protocols	VoIP passthrough support, Connection monitoring, Firewall, DHCP, QoS / Smart Queue Management (SQM), DDNS, Network backup, Load balancing, SSHFS
Network features	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSL v3, TLS, ARP, VRRP, PPP, PPPoE, UPNP, SSH, DHCP, Telnet, SMPP, SMNP, MQTT, Wake On Lan (WOL)
Security	Authentication, Firewall, Attack prevention, VLAN, Mobile quota control, WEB filter, Access control
Routing	Static routing, Dynamic routing (BGP, OSPF v2, RIP v1/v2, NHRP)
VPN	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, ZeroTier, WireGuard
Monitoring and Management	WEB UI, FOTA, SSH, SMS, Call, TR-069, MQTT, SNMP, JSON-RPC, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget Reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, Cloud of Things, ThingWorx, Cumulocity, Azure IoT Hub
Hotspot	Captive portal (Hotspot), internal/external Radius server, built in customizable landing page
SMS features	SMS status, SMS configuration, send/read SMS via HTTP POST/GET, EMAIL to SMS, SMS to EMAIL, SMS to HTTP, SMS to SMS, scheduled SMS, SMS autoreply, SMPP

# RUT950

## INDUSTRIAL CELLULAR ROUTER

RUT950 is a high-performance cellular router featuring dual-SIM, four Ethernet interfaces, and Wi-Fi. The device is designed as a primary or backup internet source to guarantee a reliable connection with high data throughput and data redundancy. RUT950 comes with RutOS software security features and RMS support.

### CONNECTIVITY

4G LTE (Cat 4), 3G, 2G

### DUAL SIM

With auto failover, backup WAN and other switching scenarios

### WI-FI

Wireless Access Point with Hotspot functionality

### WAN FAILOVER

Automatic switching to available Backup connection

### STANDARD PACKAGE CONTAINS:

RUT950 // 9 W PSU // 2 x LTE antennas (swivel, SMA male) // 2 x WiFi antennas (swivel, RP-SMA male) // Ethernet cable (1.5 m) // SIM Adapter kit // RMS Flyer // QSG (Quick Start Guide) // Packaging box

## HARDWARE



Mobile	4G/LTE (Cat 4), 3G, 2G
CPU	Atheros, MIPS 74Kc, 550 MHz
Storage	16 MB Flash
Memory	128 MB RAM
Powering option	4pin power socket, 9-30 VDC
SIM	2 x External SIM holders (2FF)
Antenna connectors	2 x SMA for mobile, 2 x RP-SMA for WiFi
Ethernet	4 x 10/100 Ethernet ports: 1 x WAN (configurable as LAN), 3 x LAN
WiFi	IEEE 802.11b/g/n, Access point (AP), Station (STA)
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output
Status LEDs	1 x Bi-Color connection type, 5 x Signal strength, 4 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option, plastic panels with flat mounting option
Dimensions (W x H x D)	110 x 50 x 100 mm
Weight	280 g

## SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Routing	Static routes, Dynamic routes (BGP, OSPFv2, RIPv1/v2, EIGRP, NHRP), Routing rules
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, ZeroTier, WireGuard
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Hotspot	External/Internal Radius, SMS OTP, MAC authentication, Walled Garden
Supported Hotspot platforms	IronWiFi, HotspotSystem, Cloud4Wi, SAI + WiFi, MugiCloud, Purple.ai
SMS features	SMS status, SMS configuration, Send/Read SMS via HTTP POST/GET, EMAIL to SMS, SMS to Email, SMS to HTTP, SMS to SMS, scheduled SMS, SMS autoreply, SMPP
Services	DDNS, VRRP, Wake On Lan (WOL), WEB filter, UPNP, Traffic Logging

# RUT951

## INDUSTRIAL CELLULAR ROUTER

RUT951 features dual-SIM cellular connectivity combined with Wi-Fi and four Ethernet interfaces to meet the needs of the most varied IoT scenarios. Powered by RutOS, this router offers advanced customization options, automation features, and top-level security for your solution.

### CONNECTIVITY

4G LTE (Cat 4), 3G, 2G

### DUAL SIM

With auto failover, backup WAN and other switching scenarios

### WI-FI

Wireless Access Point with Hotspot functionality

### WAN FAILOVER

Automatic switching to available Backup connection

### STANDARD PACKAGE CONTAINS:

RUT951 // 9 W PSU // 2 x LTE antennas (swivel, SMA male) // 2 x WiFi antennas (swivel, RP-SMA male) // Ethernet cable (1.5 m) // SIM Adapter kit // RMS Flyer // QSG (Quick Start Guide) // Packaging box

## HARDWARE



Mobile	4G/LTE (Cat 4), 3G, 2G
CPU	Mediatek MIPS 24Kc 580 MHz
Storage	16 MB Flash
Memory	128 MB RAM
Powering option	4pin power socket, 9-30 VDC
SIM	2 x External SIM holders (2FF)
Antenna connectors	2 x SMA for mobile, 2 x RP-SMA for WiFi
Ethernet	4 x 10/100 Ethernet ports: 1 x WAN (configurable as LAN), 3 x LAN
WiFi	IEEE 802.11b/g/n, Access point (AP), Station (STA)
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output
Status LEDs	1 x Bi-Color connection type, 5 x Signal strength, 4 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option, plastic panels with flat mounting option
Dimensions (W x H x D)	110 x 50 x 100 mm
Weight	287 g

## SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Routing	Static routes, Dynamic routes (BGP, OSPFv2, RIPv1/v2, EIGRP, NHRP), Routing rules
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, ZeroTier, WireGuard
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Hotspot	External/Internal Radius, SMS OTP, MAC authentication, Walled Garden
Supported Hotspot platforms	IronWiFi, HotspotSystem, Cloud4Wi, SAI + WiFi, MugiCloud, Purple.ai
SMS features	SMS status, SMS configuration, Send/Read SMS via HTTP POST/GET, EMAIL to SMS, SMS to Email, SMS to HTTP, SMS to SMS, scheduled SMS, SMS autoreply, SMPP
Services	DDNS, VRRP, Wake On Lan (WOL), WEB filter, UPNP, Traffic Logging

# RUT955

## INDUSTRIAL CELLULAR ROUTER

RUT955 offers a dual-SIM cellular connection, four Ethernet ports, and Wi-Fi combined with RS232, RS485, USB interfaces, and inputs/outputs for an incredible variety of professional application scenarios. This router comes with RutOS advanced software features such as Modbus, SNMP, TR-069, NTRIP, MQTT protocol support, and GNSS tracking capabilities.

### CONNECTIVITY

4G LTE (Cat 4), 3G, 2G

### DUAL SIM

With auto failover, backup WAN and other switching scenarios

### MULTIPLE INTERFACES

Ethernet, Serial (RS232, RS485) and multiple Inputs/Outputs for any industrial connectivity use case

### GNSS

Global Navigation Satellite System for location services and time synchronization

### STANDARD PACKAGE CONTAINS:

RUT955 // 9 W PSU // 2 x LTE antennas (magnetic mount, SMA male, 3 m cable) // 2 x WiFi antennas (magnetic mount, RP-SMA male, 1.5 m cable) // GNSS antenna (adhesive, SMA male, 3 m cable) // RS485 connector block // I/O connector block // Ethernet cable (1.5 m) // SIM Adapter kit // QSG (Quick Start Guide) // Packaging box

# HARDWARE



Mobile	4G/LTE (Cat 4), 3G, 2G
CPU	Atheros, MIPS 74Kc, 550 MHz
Storage	16 MB Flash
Memory	128 MB RAM
Powering option	4pin power socket, 9-30 VDC
SIM	2 x External SIM holders (2FF)
Antenna connectors	2 x SMA for mobile, 2 x RP-SMA for WiFi, 1 x SMA for GPS
Ethernet	4 x 10/100 Ethernet ports: 1 x WAN (configurable as LAN), 3 x LAN
WiFi	IEEE 802.11b/g/n, Access point (AP), Station (STA)
GNSS	GPS, GLONASS, BeiDou, Galileo, QZSS
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output On 10pin socket: 1 x Isolated digital input, 1 x Digital dry input, 1 x Analog input, 1 x Isolated open collector output (requires external voltage), 1 x Relay output (non-latching)
Serial	1 x RS232, 1 x RS485
Other	1 x USB host, 1 x MicroSD
Status LEDs	1 x Bi-Color connection type, 5 x Signal strength, 4 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option, plastic panels with flat mounting option
Dimensions (W x H x D)	110 x 50 x 100 mm
Weight	287 g

# SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
NTP	NTP Server, NTP Client, Sync with: External NTP server, GNSS, Mobile operator
GNSS	NMEA forwarding, AVL, Geofencing
Modbus	TCP slave, TCP master, RTU master, RTU gateway, Modbus over MQTT
Serial	Console, Over IP, Modem, NTRIP, Modbus

# RUT956

## INDUSTRIAL CELLULAR ROUTER

RUT956 is an industrial router that combines cellular, Wi-Fi, and wired connectivity options with automatic WAN failover and GNSS capabilities. Serial communication interfaces enable integrating more varied devices into the solution ecosystem, while I/O and advanced RutOS software facilitate equipment control, automation, and event notifications.

### CONNECTIVITY

4G LTE (Cat 4), 3G, 2G

### DUAL SIM

With auto failover, backup WAN and other switching scenarios

### MULTIPLE INTERFACES

Ethernet, Serial (RS232, RS485) and multiple Inputs/Outputs for any industrial connectivity use case

### GNSS

Global Navigation Satellite System for location services and time synchronization

### STANDARD PACKAGE CONTAINS:

RUT956 // 9 W PSU // 2 x LTE antennas (magnetic mount, SMA male, 3 m cable) // 2 x WiFi antennas (magnetic mount, RP-SMA male, 1.5 m cable) // GNSS antenna (adhesive, SMA male, 3 m cable) // RS485 connector block // I/O connector block // Ethernet cable (1.5 m) // SIM Adapter kit // QSG (Quick Start Guide) // Packaging box

# HARDWARE



Mobile	4G/LTE (Cat 4), 3G, 2G
CPU	Mediatek MIPS 24Kc 580 MHz
Storage	16 MB Flash
Memory	128 MB RAM
Powering option	4pin power socket, 9-30 VDC
SIM	2 x External SIM holders (2FF)
Antenna connectors	2 x SMA for mobile, 2 x RP-SMA for WiFi, 1 x SMA for GPS
Ethernet	4 x 10/100 Ethernet ports: 1 x WAN (configurable as LAN), 3 x LAN
WiFi	IEEE 802.11b/g/n, Access point (AP), Station (STA)
GNSS	GPS, GLONASS, BeiDou, Galileo, QZSS
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output On 10pin socket: 1 x Isolated digital input, 1 x Digital dry input, 1 x Analog input, 1 x Isolated open collector output (requires external voltage), 1 x Relay output (non-latching)
Serial	1 x RS232, 1 x RS485
Other	1 x USB host
Status LEDs	1 x Bi-Color connection type, 5 x Signal strength, 4 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option, plastic panels with flat mounting option
Dimensions (W x H x D)	110 x 50 x 100 mm
Weight	287 g

# SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
NTP	NTP Server, NTP Client, Sync with: External NTP server, GNSS, Mobile operator
GNSS	NMEA forwarding, AVL, Geofencing
Modbus	TCP slave, TCP master, RTU master, RTU gateway, Modbus over MQTT
Serial	Console, Over IP, Modem, NTRIP, Modbus

# RUTX09

## INDUSTRIAL CELLULAR ROUTER

RUTX09 is an LTE-A Cat 6 cellular IoT router with dual-SIM, Carrier Aggregation, and four Gigabit Ethernet interfaces. Designed as a primary or backup internet source, it can offer up to 300 Mbps cellular speeds, with high data throughput.

### 4G LTE CAT 6

Cellular speeds up to 300Mbps with Carrier Aggregation

### DUAL SIM

With auto failover, backup WAN and other switching scenarios

### GIGABIT ETH

4 x Gigabit Ethernet ports with up to 128 port/tag-based VLANs supported

### GNSS

Global Navigation Satellite System for location services and time synchronization

## STANDARD PACKAGE CONTAINS:

RUTX09 // 18 W PSU // 2 x LTE antennas (swivel, SMA male) // 1 x GNSS antenna (adhesive, SMA male, 3 m cable) // SIM Adapter kit // Ethernet cable (1.5 m) // RMS Flyer // QSG (Quick Start Guide) // Packaging box


# HARDWARE



Mobile	4G/LTE (Cat 6), 3G
CPU	Qualcomm, 4 x ARM Cortex A7, 717 MHz
Storage	256 MB Flash
Memory	256 MB RAM
Powering option	4pin power socket, 9-50 VDC
SIM	2 x External SIM holders (2FF)
Antenna connectors	2 x SMA for mobile, 1 x SMA for GPS
Ethernet	4 x 10/100/1000 Ethernet ports: 1 x WAN (configurable as LAN), 3 x LAN
GNSS	GPS, GLONASS, BeiDou, Galileo, QZSS
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output
Other	1 x USB host
Status LEDs	3 x WAN type, 2 x Connection type, 5 x Signal strength, 8 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option and grounding capability
Dimensions (W x H x D)	115 x 44.2 x 95.1 mm
Weight	455 g

# SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Multiple PDN, Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Network	Failover (Network backup), VLAN, QoS, Load Balancing
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, WireGuard, ZeroTier
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
NTP	NTP Server, NTP Client, Sync with: External NTP server, GNSS, Mobile operator
GNSS	NMEA forwarding, AVL, Geofencing
Services	DDNS, VRRP, Wake On Lan (WOL), WEB filter, UPNP, Network shares (Samba), Traffic Logging
Administration	Multi user, Configuration profiles, Diagnostics, logs, Configuration backup

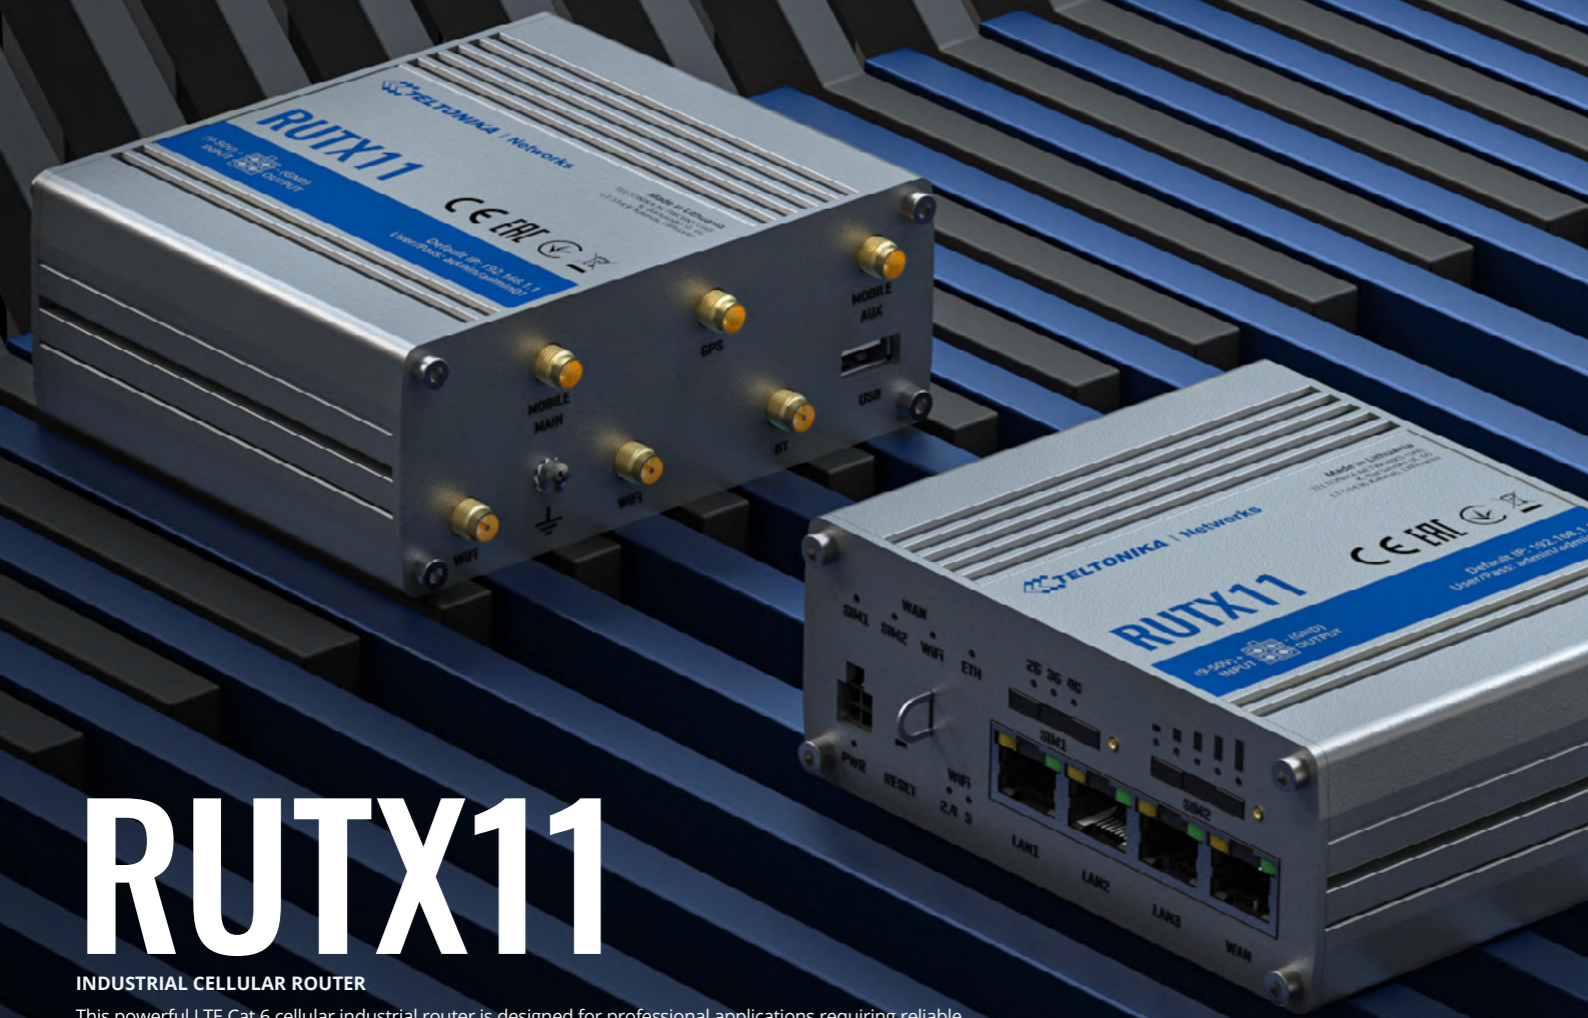

# RUTX11

**INDUSTRIAL CELLULAR ROUTER**

This powerful LTE Cat 6 cellular industrial router is designed for professional applications requiring reliable, fast connection and high data throughput. It is equipped with four Gigabit Ethernet ports, AC Wi-Fi, Bluetooth LE, and comes with remote management capabilities of RMS.

**4G LTE CAT 6**  
Cellular speeds up to 300Mbps with Carrier Aggregation

**DUAL SIM**  
With auto failover, backup WAN and other switching scenarios

**WI-FI & BT**  
Wave-2 802.11ac Dual Band WiFi and Bluetooth LE

**GIGABIT ETH**  
4 x Gigabit Ethernet ports with up to 128 port/tag-based VLANs supported

**STANDARD PACKAGE CONTAINS:**

RUTX11 // 18 W PSU // 2 x LTE antennas (swivel, SMA male) // 2 x WiFi antennas (swivel, RP-SMA male) // 1 x GNSS antenna (adhesive, SMA male, 3 m cable) // 1 x Bluetooth antenna (magnetic mount, RP-SMA male, 1.5 m cable) // SIM Adapter kit // Ethernet cable (1.5 m) // RMS Flyer // QSG (Quick Start Guide) // Packaging box

# HARDWARE

Mobile	4G/LTE (Cat 6), 3G
CPU	Qualcomm, 4 x ARM Cortex A7, 717 MHz
Storage	256 MB Flash
Memory	256 MB RAM
Powering option	4pin power socket, 9-50 VDC
SIM	2 x External SIM holders (2FF)
Antenna connectors	2 x SMA for mobile, 2 x RP-SMA for WiFi, 1 x RP-SMA for Bluetooth, 1 x SMA for GPS
Ethernet	4 x 10/100/1000 Ethernet ports: 1 x WAN (configurable as LAN), 3 x LAN
WiFi	IEEE 802.11b/g/n 2.4GHz, IEEE 802.11ac/n/a 5GHz, Access point (AP), Station (STA)
GNSS	GPS, GLONASS, BeiDou, Galileo, QZSS
Bluetooth	4.0 (Low energy)
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output
Other	1 x USB host
Status LEDs	4 x WAN type, 2 x Connection type, 5 x Signal strength, 2 x WiFi, 8 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option and grounding capability
Dimensions	115 x 44.2 x 95.1 mm
Weight	456 g

# SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Multiple PDN, Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Routing	Static routes, Dynamic routes (BGP, OSPFv2, RIPv1/v2, EIGRP, NHRP), Routing rules
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, WireGuard, ZeroTier
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Hotspot	External/Internal Radius, SMS OTP, MAC authentication, Walled Garden
NTP	NTP Server, NTP Client, Sync with: External NTP server, GNSS, Mobile operator
GNSS	NMEA forwarding, AVL, Geofencing



# RUTX12

**DUAL LTE CAT 6 INDUSTRIAL CELLULAR ROUTER**

This powerful dual LTE Cat 6 router is a great fit for mission-critical applications. Two cellular modems for dual simultaneous connections, seamless mobile service switching and load balancing features make this device irreplaceable in applications where losing connection is not an option.

**DUAL LTE**  
Cellular speeds up to 600Mbps with dual simultaneous LTE CAT 6 connections

**DUAL SIM**  
Instant failover switching

**WI-FI & BT**  
Wave-2 802.11ac Dual Band WiFi and Bluetooth LE

**LOAD BALANCING**  
Allows to use multiple WAN sources to increase throughput

**STANDARD PACKAGE CONTAINS:**

RUTX12 // 24 W PSU // 4 x LTE antennas (swivel, SMA male) // 2 x WiFi antennas (magnetic mount, RP-SMA male, 1.5 m cable) // 1 x GNSS antenna (adhesive, SMA male, 3 m cable) // 1 x Bluetooth antenna (magnetic mount, RP-SMA male, 1.5 m cable) // SIM Adapter kit // Ethernet cable (1.5 m) // RMS Flyer // QSG (Quick Start Guide) // Packaging box

# HARDWARE



Mobile	2 X 4G/LTE (Cat 6), 3G
CPU	Qualcomm, 4 x ARM Cortex A7, 717 MHz
Storage	256 MB Flash
Memory	256 MB RAM
Powering option	4pin power socket, 9-50 VDC
SIM	2 x External SIM holders (2FF)
Antenna connectors	4 x SMA for mobile, 2 x RP-SMA for WiFi, 1 x RP-SMA for Bluetooth, 1 x SMA for GPS
Ethernet	5 x 10/100/1000 Ethernet ports: 1 x WAN (configurable as LAN), 4 x LAN
WiFi	IEEE 802.11b/g/n 2.4GHz, IEEE 802.11ac/n/a 5GHz, Access point (AP), Station (STA)
GNSS	GPS, GLONASS, BeiDou, Galileo, QZSS
Bluetooth	4.0 (Low energy)
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output
Other	1 x USB host
Status LEDs	4 x WAN type, 6 x Connection type, 6 x Signal strength, 2 x WiFi, 10 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option and grounding capability
Dimensions (W x H x D)	132 x 44.2 x 95.1 mm
Weight	540 g

# SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Multiple PDN, Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Routing	Static routes, Dynamic routes (BGP, OSPFv2, RIPv1/v2, EIGRP, NHRP), Routing rules
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Hotspot	External/Internal Radius, SMS OTP, MAC authentication, Walled Garden
Supported Hotspot platforms	IronWiFi, HotspotSystem, Cloud4Wi, SAI + WiFi, MugiCloud, Purple.ai





# RUTX14

## 4G LTE CAT 12 INDUSTRIAL CELLULAR ROUTER

RUTX14 is the fastest single modem LTE-A Cat 12 router in the Teltonika Networks product range. With two SIM cards, Wave-2 dual-band Wi-Fi, five Gigabit Ethernet ports, and automatic failover, you may expect high compatibility, unbeatable network resilience, and exceptional speed.

### 4G LTE CAT12

Incredible download & upload speeds with carrier aggregation (up to 600 Mbps / 150 Mbps respectively)

### DUAL SIM

With auto failover, backup WAN and other switching scenarios

### WI-FI & BT

Wave-2 802.11ac Dual Band WiFi and Bluetooth LE

### GIGABIT ETH

5 x Gigabit Ethernet ports with up to 128 port/tag-based VLANs supported

### STANDARD PACKAGE CONTAINS:

RUTX14 // 24 W PSU // 4 x LTE antennas (swivel, SMA male) // 2 x WiFi antennas (magnetic mount, RP-SMA male, 1.5 m cable) // 1 x GNSS antenna (adhesive, SMA male, 3 m cable) // 1 x Bluetooth antenna (magnetic mount, RP-SMA male, 1.5 m cable) // SIM Adapter kit // Ethernet cable (1.5 m) // RMS Flyer // QSG (Quick Start Guide) // Packaging box

# HARDWARE

Mobile	4G/LTE (Cat 12)
CPU	Qualcomm, 4 x ARM Cortex A7, 717 MHz
Storage	256 MB Flash
Memory	256 MB RAM
Powering option	4 pin power socket, 9-50 VDC
SIM	2 x External SIM holders (2FF)
Antenna connectors	4 x SMA for mobile, 2 x RP-SMA for WiFi, 1 x RP-SMA for Bluetooth, 1 x SMA for GPS
Ethernet	5 x 10/100/1000 Ethernet ports: 1 x WAN (configurable as LAN), 4 x LAN
WiFi	IEEE 802.11b/g/n 2.4GHz, IEEE 802.11n/ac 5GHz, Access point (AP), Station (STA)
GNSS	GPS, GLONASS, BeiDou, Galileo, QZSS
Connectors	1 x 4 pin DC, 5 x Ethernet, 4 x SMA for LTE, 2 x WiFi RP-SMA, 1 x SMA for GNSS, 1 x RP-SMA for Bluetooth
Bluetooth	4.0 (Low energy)
Inputs/Outputs	On 4 pin socket: 1 x Digital input, 1 x Digital open collector output
Other	1 x USB host, 1 x Grounding screw
Status LEDs	4 x WAN type, 2 x Connection type, 3 x Signal strength, 2 x WiFi, 10 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option and grounding capability
Dimensions (W x H x D)	132 x 44.2 x 95.1 mm
Weight	515 g

# SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Multiple PDN, Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Routing	Static routes, Dynamic routes (BGP, OSPFv2, RIPv1/v2, EIGRP, NHRP), Routing rules
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Hotspot	External/Internal Radius, SMS OTP, MAC authentication, Walled Garden
Supported Hotspot platforms	IronWiFi, HotspotSystem, Cloud4Wi, SAI + WiFi, MugiCloud, Purple.ai



# RUTX50

**INDUSTRIAL 5G ROUTER**

RUTX50 is a dual-SIM multi-network router offering 5G mobile communication for high-speed and data-heavy applications. Together with Gigabit Ethernet ports and dual-band Wi-Fi, it enables reliable data transfer with auto-failover. Backward compatibility and multiple interfaces allow for long-term expandability and upgrading options.

**5G**

Ultra-high cellular speeds of up to 3.3 Gbps

**DUAL SIM**

Uninterrupted communication with auto-failover

**SA & NSA**

Supports both architectures to leverage the 5G infrastructure

**FUTURE-PROOFING**

Backward compatible with 4G (LTE CAT 20) and 3G network technologies

**STANDARD PACKAGE CONTAINS:**

RUTX50 Router // 18 W PSU // 4 x Mobile antennas (swivel, SMA male) // 2 x WiFi antennas (magnetic mount, RP-SMA male, 1.5 m cable) // 1 x GNSS antenna (adhesive, SMA male, 3 m cable) // Ethernet cable (1.5 m) // SIM Adapter kit // QSG (Quick Start Guide) / RMS Flyer // Packaging box

# HARDWARE



Mobile	5G Sub-6Ghz SA/NSA 2.1/3.3Gbps DL (4x4 MIMO), 900/600 Mbps UL (2x2); 4G (LTE) – LTE Cat 20 2.0Gbps DL, 200Mbps UL; 3G – 42 Mbps DL, 5.76Mbps UL
CPU	Quad-core ARM Cortex A7, 717 MHz
Storage	256 MB Flash
Memory	256 MB RAM
Powering option	4-pin power socket, 9-50 VDC
SIM	2 x External SIM holders (2FF)
Antenna connectors	4 x SMA for mobile, 2 x RP-SMA for WiFi, 1 x SMA for GNSS
Ethernet	5 x 10/100/1000 Ethernet ports: 1 x WAN (configurable as LAN), 4 x LAN
WiFi	IEEE 802.11b/g/n 2.4GHz, IEEE 802.11n/ac 5GHz, Access point (AP), Station (STA)
Wireless mesh/roaming	Wireless mesh (802.11s), fast roaming (802.11r)
GNSS	GPS, GLONASS, BeiDou, Galileo, QZSS
Inputs/Outputs	On 4-pin socket: 1 x Digital input, 1 x Digital open collector output
Other	1 x USB host, 1 x Grounding screw
Status LEDs	3 x connection tipe, 3 x signal strength, 10 x Ethernet, 4 x WAN tipe, 1x Power, 2 x 2.4G and 5G WiFi
Operating temperature	-40 °C to 75 °C
Housing	Aluminum housing, DIN rail mounting option
Dimensions (W x H x D)	132 x 44.2 x 95.1 mm
Weight	533 g

# SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Multiple PDN, Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network	Routing, Failover, Firewall, DHCP, DDNS, Load Balancing, VoIP passthrough, Connection monitoring
Routing	Static routing, Dynamic routing (BGP, OSPF v2, RIP v1/v2, EIGRP, NHRP)
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, WireGuard, ZeroTier
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Hotspot	External/Internal Radius, SMS OTP, MAC authentication, Walled Garden
GNSS	NMEA forwarding, AVL, Geofencing

# RUTXR1

**ENTERPRISE SFP/LTE RACK MOUNT READY ROUTER**

The first rack-mountable LTE Cat 6 router in the Teltonika Networks portfolio comes with redundant power supplies, WAN failover, dual-SIM, SFP, USB, and dedicated console ports. This feature-rich device with highly customizable and powerful RutOS is perfect where a fast and ultra-reliable connection is needed.

**4G LTE CAT 6**

Cellular speeds up to 300Mbps with Carrier Aggregation

**SFP**

SFP port for long-range Fiber-optic communication

**WI-FI**

Wave-2 802.11ac Dual Band WiFi

**DUAL POWER**

Dual Power supply compatibility ensures uninterrupted service

**STANDARD PACKAGE CONTAINS:**

RUTXR1 // 18 W PSU // 2 x LTE antennas (magnetic mount, SMA male, 3 m cable) // 2 x WiFi antennas (magnetic mount, RP-SMA male, 1.5 m cable) // 1 Rack - mounting kit // 4 x Standing pads // 8 x Screws // SIM Adapter kit // Ethernet cable (1.5 m) // RMS Flyer // QSG (Quick Start Guide) // Packaging box



## HARDWARE



Mobile	4G/LTE (Cat 6), 3G
CPU	QualcomStorageARM Cortex A7, 717 MHz
Storage	256 MB Flash
Memory	256 MB RAM
Powering option	4pin power socket, 9-50 VDC (main) 4pin power socket, 9-50 VDC (redundant)
SIM	2 x External SIM holders (2FF)
Antenna connectors	2 x SMA for mobile, 2 x RP-SMA for WiFi
Ethernet	5 x 10/100/1000 Ethernet ports: 1 x WAN (configurable as LAN), 4 x LAN
WiFi	IEEE 802.11a/b/g/n/ac 2.4GHz/5GHz, Access point (AP), Station (STA)
Other	1 x USB host, 1 x SFP, 1 x RS232 console
Status LEDs	2 x WAN type, 2 x Connection type, 3 x Signal strength, 2 x SIM, 2 x Console, 10 x Ethernet, 2 x Power
Operating temperature	-40 °C to 75 °C
Housing	Full aluminium rack unit housing with grounding capability
Dimensions (W x H x D)	272 x 42.6 x 122.6 mm
Weight	1050 g

## SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Multiple PDN, Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Routing	Static routes, Dynamic routes (BGP, OSPFv2, RIPv1/v2, EIGRP, NHRP), Routing rules
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, WireGuard, ZeroTier
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Services	DDNS, VRRP, Wake On Lan (WOL), WEB filter, UPNP, Network shares (Samba), Traffic Logging

# TCR100

## 4G Wi-Fi ROUTER FOR HOME USER

Extensive industrial IoT experience brought to our home users. This LTE-A Cat 6 router also offers dual-band Wi-Fi and two Ethernet ports to connect devices. Featuring Wi-Fi and Wi-Fi Protected buttons for quick setup, this router is simple to use yet enables high customizability for advanced users with RutOS.

### 4G LTE-ADVANCED

LTE CAT6 enables cellular speeds up to 300Mbps with carrier aggregation

### WI-FI

Dual-Band with 2.4 GHz & 5.0 GHz frequencies

### SECURE

Firewall and numerous VPN services including OpenVPN, IPsec, PPTP, L2TP & DMVPN

### RUTOS

Powerful OS with intuitive UI based on OpenWrt empowers endless configuration possibilities.

## STANDARD PACKAGE CONTAINS:

TCR100 // 18 W PSU // 2 x LTE antennas (swivel, SMA male) // SIM Adapter kit // Ethernet cable (1.5 m) // RMS Flyer // QSG (Quick Start Guide) // Packaging box

# HARDWARE



Mobile	4G/LTE (Cat 6), 3G
CPU	Qualcomm, MIPS 24Kc, 650 MHz
Memory	16 MBytes Flash, 128 MBytes RAM
Powering option	4pin power socket, 9-30 VDC
SIM	1 x External SIM holder (2FF)
Antenna connectors	2 x SMA for mobile
Ethernet	2 x 10/100 Ethernet ports: 1 x WAN (configurable as LAN), 1 x LAN
WiFi	2.4 GHz (802.11 b/g/n, 2x2 MIMO), 5 GHz (802.11 ac, 1x1 MIMO), Access Point (AP), Station (STA)
Status LEDs	1 x Internet, 1 x WiFi, 3 x Mobile connection strength, 2 x Ethernet status
Operating temperature	-40 °C to 75 °C
Housing	Plastic housing with aluminum screws and heatsink
Dimensions (W x H x D)	150 x 37 x 105 mm
Weight	376 g

# SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Auto APN, Band lock
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Security	DDOS prevention (SYN flood protection, SSH attack prevention, HTTP/HTTPS attack prevention), Port
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, ZeroTier, WireGuard
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
SMS features	SMS status, SMS configuration, Send/Read SMS via HTTP POST/GET, EMAIL to SMS, SMS to Email, SMS to HTTP, SMS to SMS, scheduled SMS, SMS autoreply
Services	DDNS, VRRP, Wake On Lan (WOL), WEB filter, UPNP, Traffic Logging

# SAFE AND SIMPLE TO SET UP HOME NETWORK WITH TCR100



// SMART CITY

Our households continue transforming into living and breathing technological ecosystems as more smart devices enter our lives. You may have an automated conditioning system that only turns on at certain times to save energy or turn on your robot vacuum cleaner while at work. That is no longer science fiction but a current-day reality.

## SOLUTION


With the first-ever consumer router from Teltonika Networks, you get a user-friendly solution for setting up your home connectivity. Even in remote areas, you can enjoy stable internet, as TCR100 offers 4G cellular connectivity without compromising your speed. It is a perfect choice, even when a wired connection is impossible.

In this use case, two Ethernet ports accommodate a smart TV and an NVR that stores video feed from connected IP cameras. The rest of the devices like a smart fridge, laptop, AC, and alarm systems connect to the network wirelessly. The data from connected equipment can be helpful to optimize your IoT setup. Unlike standard home routers, the TCR100 can support over 50 devices simultaneously, thanks to the applied know-how from the industrial sector.

TCR100 is easy to set up. It features Wi-Fi and Wi-Fi Protected buttons for wireless network access within a click. Besides, a user-friendly WebUI provides rich customization options, a pre-configured firewall, and guest Wi-Fi to ensure the security of your home network. On top of that, periodical firmware updates eliminate vulnerabilities and bring new functionality.

## BENEFITS

- /4G Cat6 technology and Dual-band Wi-Fi offer excellent wireless performance for all connected devices, even in remote locations.
- /RutOS is friendly for newcomers yet full of customization possibilities for advanced users.
- /TCR100 is simple to set up, even for beginners.
- /This model has Wi-Fi and Wi-Fi Protected buttons for easy wireless network access.
- /TCR100 receives periodical firmware downloads, bringing enhanced security and new features to your home router.

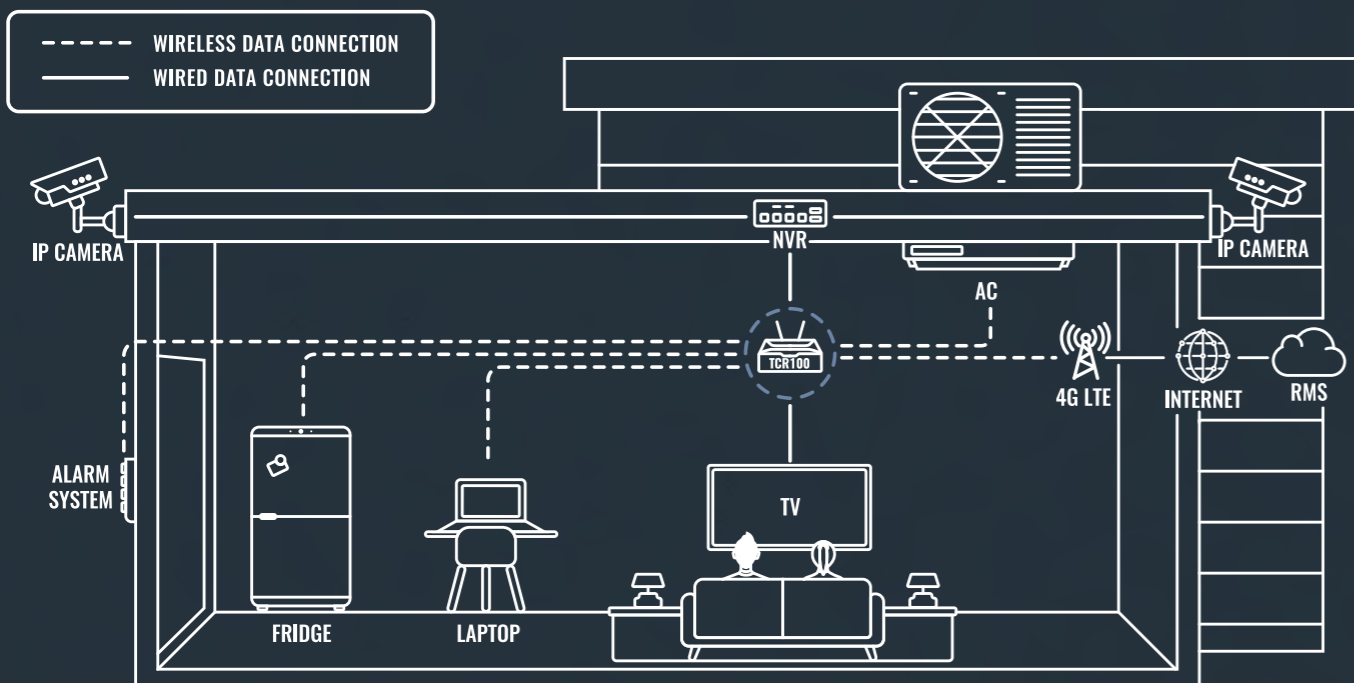

# WIRELESS BROADBAND CONNECTIVITY FOR GAS STATIONS



// RETAIL

Despite growing awareness regarding global warming and the greenhouse effect, gasoline and diesel remain the most common fuels today. Besides, the times when gas stations had only one purpose of supplying gasoline been long gone. Nowadays, they are multifunctional zones that often include convenience stores, cafes, resting areas, restrooms, and more. The number of gas stations is still growing in a lot of places around the world: some are in the cities and some - in remote areas. This variety comes with a set of connectivity challenges.

## SOLUTION

RUTX14 router is the central piece of this solution. This first-ever LTE Cat 12 cellular router in our portfolio enables quick and easy deployment in any situation, even in remote areas. Opting for wireless cellular connectivity reduces the complexity of the solution, so it takes significantly less time and installation resources. Cat 12 router can reach speeds up to 600 Mbps, which is enough to serve the varied needs of devices used in similar environments.


Surveillance cameras inside and outside the petrol station, Points of Sale (POS), digital signage screens require speedy connection, network stability, and broad data bandwidth. These devices connect

to the router via Ethernet cables through five available Gigabit ports available on RUTX14. Product scanners, tablets, and other wireless devices used for work purposes connect to a private WIFI network for security reasons. There is a separate public Guest WIFI created for the visitors. A wide selection of VPN services ensures that the most varied security requirements and preferences are met.

For an even more simplified solution, our TSW100 switch can power up the cameras via PoE. Compatibility with RMS and various other IoT platforms enables remote accessibility for IT support teams and various integrators to prevent any downtime and solve issues immediately and cost-efficiently.

## BENEFITS

- /Speedy connection with download speeds up to 600 Mbps and upload speeds up to 150 Mbps.
- /Quick and straightforward setup for an all-in-one solution to connect an ecosystem of multiple devices.
- /Multiple WANs and various VPNs to secure your network.
- /Remote management and monitoring via RMS or a variety of third-party IoT platforms.

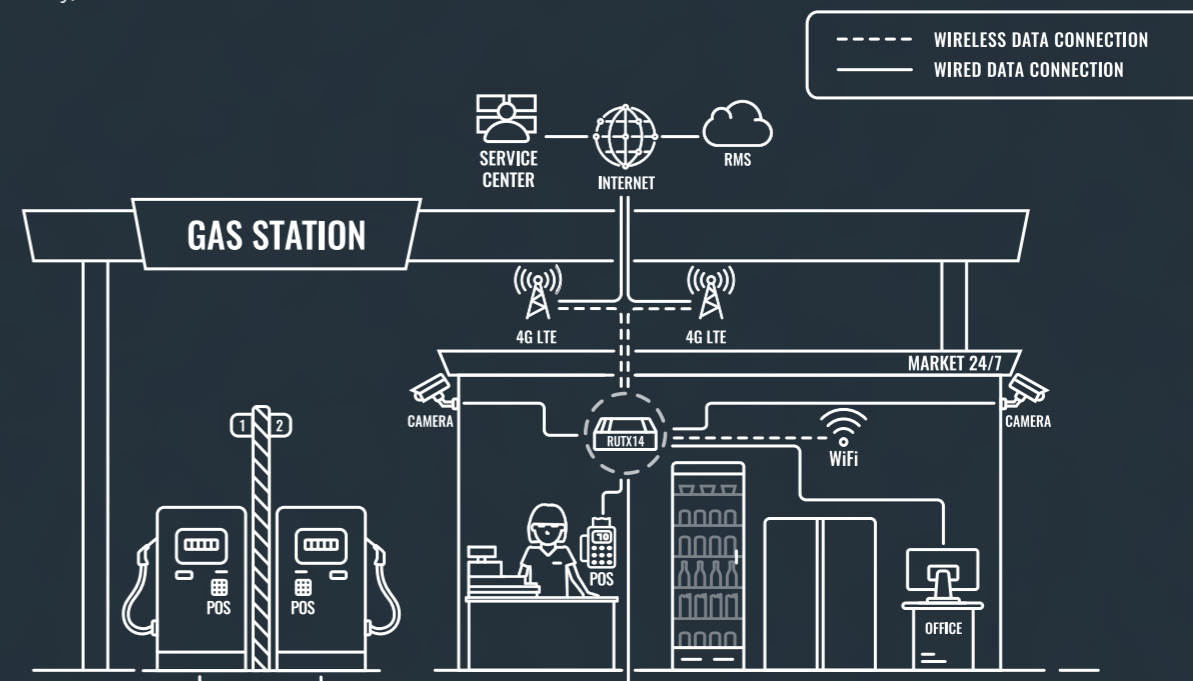

# ETHERNET & WIRELESS

## SWITCHES // ROUTERS

Ethernet & Wireless division comprises a selection of high-quality switches and routers. These products are designed with professional application scenarios in mind, where sturdy and reliable products are required for highly secure enterprise, IoT, and M2M solutions. They provide multiple interfaces for a quick infrastructure setup, even with large device ecosystems.



# TSW010

## DIN RAIL SWITCH

TSW010 offers the most affordable way to extend network connectivity to multiple Ethernet devices. Five 10/100 Ethernet ports ensure stable and reliable connectivity, sufficient for most industrial applications where high throughput is not required.

### PLUG-N-PLAY

No additional configuration needed

### MOUNTING

Integrated DIN rail bracket and surface mounting options

### 9-30 V

Wide range of supported power supply voltages

### INDUSTRIAL DESIGN

Anodized aluminum housing and panels

## STANDARD PACKAGE CONTAINS:

TSW010 // QSG (Quick Start Guide) // Packaging box

# HARDWARE

Powering option	2-pin industrial DC power socket, 9 - 30 VDC
Power consumption	Idle: 0.3 W / Max: 0.9 W
Ethernet	5 x RJ45 ports, 10/100 Mbps
Status LEDs	1 x Power LED, 10 x LAN status LEDs
Ingress protection rating	IP30
Operating temperature	-40 °C to 75 °C
Housing	Anodized aluminum housing and panels
Dimensions	113.1 x 27.4 x 80.5 mm
Weight	146.5 g
Installation	Integrated DIN rail bracket or wall mounting (additional kit needed), flat surface placement

# PERFORMANCE SPECIFICATIONS

Bandwidth (Non-blocking)	1 Gbps
MAC address table size	2K entries
Jumbo frame support	2048 bytes



# HARDWARE

Powering option	4pin power socket, 7-58 VDC
Power consumption	Idle: < 2 W, Max: < 9 W (no PoE device connected)
PoE standart	802.3af/at (max 30 W per port, total power budget 120W*)
Ethernet	5 x 10/100/1000 Ethernet ports: 4 x PoE, 1 x Uplink
Status LEDs	10 x Ethernet, 1 x Power
Ingress protection rating	IP30
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with wall or DIN rail mounting option and grounding capability
Dimensions	115 x 32 x 95 mm
Weight	340 g

# PERFORMANCE SPECIFICATIONS

Bandwidth	10 Gbps
Packet buffer	128 KB
MAC address table size	2K entries
Auto MDI/MDI-X Cable Detection	Yes

# TSW100

## INDUSTRIAL UNMANAGED POE+ SWITCH

TSW100 is an unmanaged Gigabit Ethernet switch supporting Power-over-Ethernet. Classified as power source equipment (PSE), it centralizes the power supply, providing up to 30 watts per port and reducing installation effort. Five Gigabit Ethernet ports provide an economical high-bandwidth solution for a secure industrial Ethernet network.

- PoE**  
4 x PoE+ ports with 802.3af and 802.3at support
- POWER BUDGET**  
Total power budget at PSE up to 120 W
- ETHERNET**  
5 x Gigabit Ethernet with speeds up to 1000 Mbps
- MOUNTING**  
DIN rail and surface mounting options

**STANDARD PACKAGE CONTAINS:**  
TSW100 // 65 W PSU // QSG (Quick Start Guide) // Packaging box

\*Provided power supply only allows 60 W PoE power budget at PSE, to reach maximum 120 W at PSE >130 W power PSU must be used





# TSW101

**AUTOMOTIVE PoE+ SWITCH**

Our first-ever switch for the automotive industry features five Gigabit Ethernet ports with PoE+ support to connect multiple devices to the network and power them up using the same interfaces. Enjoy reliable high bandwidth connectivity in a simple, economical, and easy-to-install solution.

**AUTOMOTIVE SWITCH**

Ideal for in-vehicle solutions

**PoE**

4 x PoE+ ports with 802.3af and 802.3at support

**ETHERNET**

5 x Gigabit Ethernet with speeds of up to 1000 Mbps

**PLUG-N-PLAY**

No need for configuration

**STANDARD PACKAGE CONTAINS:**


TSW101 // QSG (Quick Start Guide) // Packaging box

# HARDWARE

Powering option	2-pin power DC socket, 9-30 VDC
Power consumption	0.64 W / Max: 2.31 W / PoE Max: 112.58 W
PoE standart	802.3af/at (max 30 W per port, total power budget 60W)
Ethernet	5 x 10/100/1000 Ethernet ports: 4 x PoE, 1 x Uplink
Status LEDs	10 x Ethernet, 1 x Power
Ingress protection rating	IP30
Operating temperature	-40 °C to 75 °C
Housing	Aluminum housing with wall or DIN rail mounting option and grounding capability
Dimensions	115 x 32 x 95 mm
Weight	354 g

# PERFORMANCE SPECIFICATIONS

Bandwidth	10 Gbps
Packet buffer	128 KB
Jumbo frame support	9216 bytes
MAC address table size	2K entries
Auto MDI/MDI-X Cable Detection	Yes

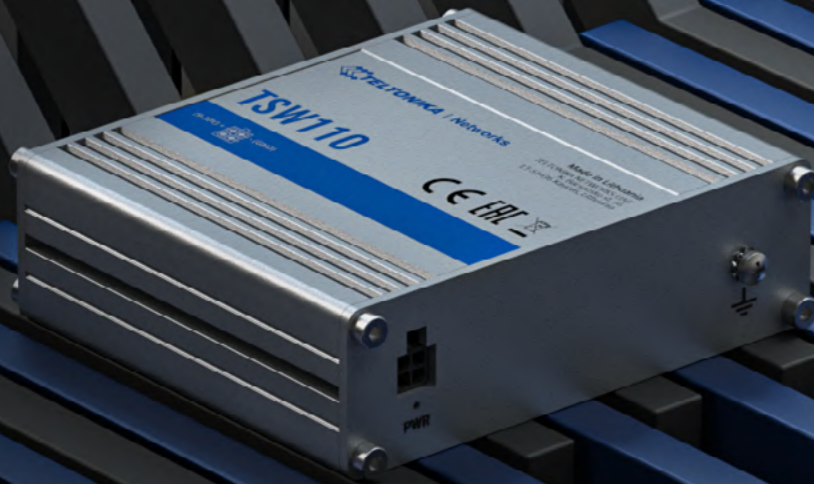

# TSW110

**L2 UNMANAGED SWITCH**

TSW110 is an unmanaged layer 2 switch. This tiny but rugged professional device enables industrial high bandwidth applications with a reliable data connection. It has five Gigabit Ethernet ports to connect equipment to the network and supports wide power supply voltages (9-30 V).

**GIGABIT ETH**

5 x Gigabit Ethernet with speeds up to 1000 Mbps

**DURABILITY**

Rugged aluminum housing

**MOUNTING**

DIN rail and surface mounting options

**TEMPERATURE**

Operating temperature -40 °C to 75 °C

**STANDARD PACKAGE CONTAINS:**

TSW110 // 9 W PSU // QSG (Quick Start Guide) // Packaging box

## HARDWARE

Powering option	4pin power socket, 9-30 VDC
Power consumption	Idle: < 0.4 W, Max: < 1.8 W
Ethernet	5 x 10/100/1000 Ethernet ports
Status LEDs	10 x Ethernet, 1 x Power
Ingress protection rating	IP30
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with wall or DIN rail mounting option and grounding capability
Dimensions	100 x 30 x 85 mm
Weight	227 g

## PERFORMANCE SPECIFICATIONS

Bandwidth	10 Gbps
Packet buffer	128 KB
MAC address table size	2K entries
Auto MDI/MDI-X Cable Detection	Yes



# TSW114

**GIGABIT DIN RAIL SWITCH**

TSW114 is an affordable way to simplify your connectivity with its plug and play nature and 5 x Gigabit Ethernet ports that provide stable and reliable connectivity for high-bandwidth solutions. The switch has front-facing ports and an integrated DIN rail bracket to enable easy installation across many industrial environments - especially control cabinets.

**EASY MOUNTING**

Integrated DIN rail bracket and front-facing ports

**GIGABIT ETHERNET**

5 x Gigabit Ethernet ports with speeds of up to 1000 Mbps

**COMPACT & DURABLE**

Rugged anodized aluminum housing that fits in your pocket

**PLUG AND PLAY**

No additional configuration needed

**STANDARD PACKAGE CONTAINS:**

TSW114 // QSG (Quick Start Guide) // Packaging box

# HARDWARE

Powering option	2-pin industrial DC power socket, 9 - 30 VDC
Power consumption	Idle: 0.3 W / Max: 2.3 W
Ethernet	5 x RJ45 ports, 10/100/1000 Mbps
Status LEDs	1 x Power LED, 10 x LAN status LEDs
Ingress protection rating	IP30
Operating temperature	-40 °C to 75 °C
Housing	Anodized aluminum housing and panels
Dimensions	113.1 x 27.4 x 80.5 mm
Weight	174 g
Installation	Integrated DIN rail bracket, wall mounting (additional kit needed), flat surface placement

# PERFORMANCE SPECIFICATIONS

Bandwidth (Non-blocking)	10 Gbps
Packet buffer	128 KB
MAC address table size	2K entries
Jumbo frame support	9216 bytes



# HARDWARE

Powering option	2 pin, push-in, terminal block
Input voltage range	7-57 VDC
Input voltage range for PoE	44-57 VDC
Power consumption	Idle: < 2 W, Max: < 9 W (no PoE device connected)
PoE standard	802.3af/at (up to 30 W per port, total power budget - 240 W)
Ethernet	8 x 10/100/1000 Mbps Ethernet ports
SFP	2 x SFP port for Optical interface
Status LEDs	16 x Ethernet, 1 x Power, 2 x SFP activity
Ingress protection rating	IP30
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with wall or DIN rail mounting option and grounding capability
Dimensions	132 x 44.2 x 95.1 mm
Weight	456 g
Installation	Desktop, wall or DIN Rail mountable (additional kit needed)

# PERFORMANCE SPECIFICATIONS

Bandwidth	20 Gbps
Packet buffer	128 KB
Jumbo frame support	9216 bytes
MAC address table size	2K entries
Auto MDI/MDI-X Cable Detection	Yes

\*PoE operates properly only when connected power supply outputs 44 V or higher voltage



# TSW200

## PoE+ GIGABIT ETHERNET SWITCH

TSW200 is an unmanaged industrial switch with 2 SFP ports for long-range Fiber-optic communication and 8 Gigabit Ethernet ports that support IEEE802.af and IEEE802.3at Power-over-Ethernet standards. Classified as power source equipment (PSE), it enables the centralization of power supply, providing up to 30 watts per port and reducing the effort to install power.

### SFP

2 x SFP ports for long-range Fiber-optic communication

### PoE

8 x PoE+ ports with 802.af, 802.3at standard support

### POWER BUDGET

Total power budget at PSE up to 240 W

### ETHERNET

8 x Gigabit Ethernet with speeds up to 1000 Mbps

## STANDARD PACKAGE CONTAINS:

TSW200 // QSG (Quick Start Guide) // Packaging box



# HARDWARE

Powering option	2-pin industrial DC power socket
Input voltage range	7-57 VDC
Power consumption	Idle: 1.03 W, Max: 3.71W
Ethernet	8 x 10/100/1000 Mbps Ethernet ports
SFP	2 x SFP ports for Optical interfaces
Status LEDs	16 x Ethernet, 1 x Power, 2 x SFP activity
Ingress protection rating	IP30
Operating temperature	-40 °C to 75 °C
Housing	Aluminum housing with wall or DIN rail mounting options and grounding capability
Dimensions	132 x 44.2 x 95.1 mm
Weight	500 g
Installation	Desktop, wall or DIN rail mountable (additional kit needed)

# PERFORMANCE SPECIFICATIONS

Bandwidth	20 Gbps
Packet buffer	128 KB
Jumbo frame support	9216 bytes
MAC address table size	2K entries
Auto MDI/MDI-X Cable Detection	Yes

# TSW210

UNMANAGED GIGABIT ETHERNET SWITCH WITH SFP

TSW210 offers a great combination of Gigabit Ethernet and SFP. Eight Ethernet ports enable connecting multiple devices to the network quickly and easily without any further configuration. SFP allows including far apart devices while maintaining high-speed rates and reliability.

## ETHERNET

8 x Gigabit Ethernet with speeds up to 1000 Mbps

## PLUG-N-PLAY

No additional configuration needed

## MOUNTING

DIN rail and surface mounting options

## SFP

SFP port for long-range Fiber-optic communication

### STANDARD PACKAGE CONTAINS:

TSW210 // QSG (Quick Start Guide) // Packaging box



# TSW304

**DIN RAIL SWITCH**

TSW304 is the tiniest switch in the Teltonika Networks portfolio, made with the industrial application scenarios in mind. This ultra-small device comes with an integrated DIN rail mounting option and will easily find its place in any server cabinet. Durable design and shock-resistant casing make it perfect for even the most challenging industrial environments.

**DIN RAIL**

Built-in, integrated DIN mounting

**COMPACT**

102 x 25 x 81.5 mm

**ETHERNET**

4 x Gigabit Ethernet with speeds up to 1000 Mbps

**7-57 V**

Wide range of supported power supply voltages

**STANDARD PACKAGE CONTAINS:**

TSW304 // QSG (Quick Start Guide) // Packaging box

# HARDWARE

Powering option	2-pin power DC socket, 7 - 57 VDC / 9 - 40 VAC
Power consumption	Idle: < 0.26 W, Max: < 1.44 W
Ethernet	4 x 10/100/1000 Ethernet ports
Status LEDs	8 x Ethernet, 1 x Power
Ingress protection rating	IP30
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with wall or DIN rail mounting option and grounding capability
Dimensions	102 x 25 x 81.5 mm
Weight	210 g
Installation	DIN Rail mountable (no additional kit needed)

# PERFORMANCE SPECIFICATIONS

Bandwidth	8 Gbps
Packet buffer	128 KB
Jumbo frame support	9216 bytes
MAC address table size	2K entries
Auto MDI/MDI-X Cable Detection	Yes

# REMOTELY MANAGED SURVEILLANCE SOLUTION FOR LOGISTICS CENTER



// SMART CITY

According to Statista, the overland freight movement market is worth 791.7 billion in the US alone. When the truck is parked, cargo safety remains crucial on the road. Naturally, such a task requires a high-tech solution.

## SOLUTION


RUTX08 industrial Ethernet router acts as a central component in the whole setup. It links the TSW100 switches into a single network and connects an NVR, which stores all the video streams from the cameras. RUTX08 acts as the main gateway between the user, the internet, and the surveillance system.

Naturally, the cameras require internet and electricity to keep running, so the TSW100 industrial PoE+ switch was a perfect fit. TSW100 provides both through the same connection. Four PoE ports accommodate CCTV cameras that monitor the parking space availability and track activity in the parking lot at any time.

Besides, the TSW100 can manage a more advanced PTZ camera with up to 30 W per Ethernet port. Combined with RMS and RUTX08, you may enjoy an entirely remotely controlled solution with an option of accessing each of the PTZ cameras' WebUI and recording automatic movement tracking. It is even more convenient when multiple devices are located across different parking sites, as you may manage them all under one user-friendly interface.

## BENEFITS

- /Easy set up with a plug-and-play TSW100 switch without any additional configurations.
- /RUTX08 features Gigabit Ethernet for uncompromised high-speed video data transfer.
- /RUTX08 is compatible with the Teltonika Remote Management System for controlling multiple camera settings without traveling to the physical location.

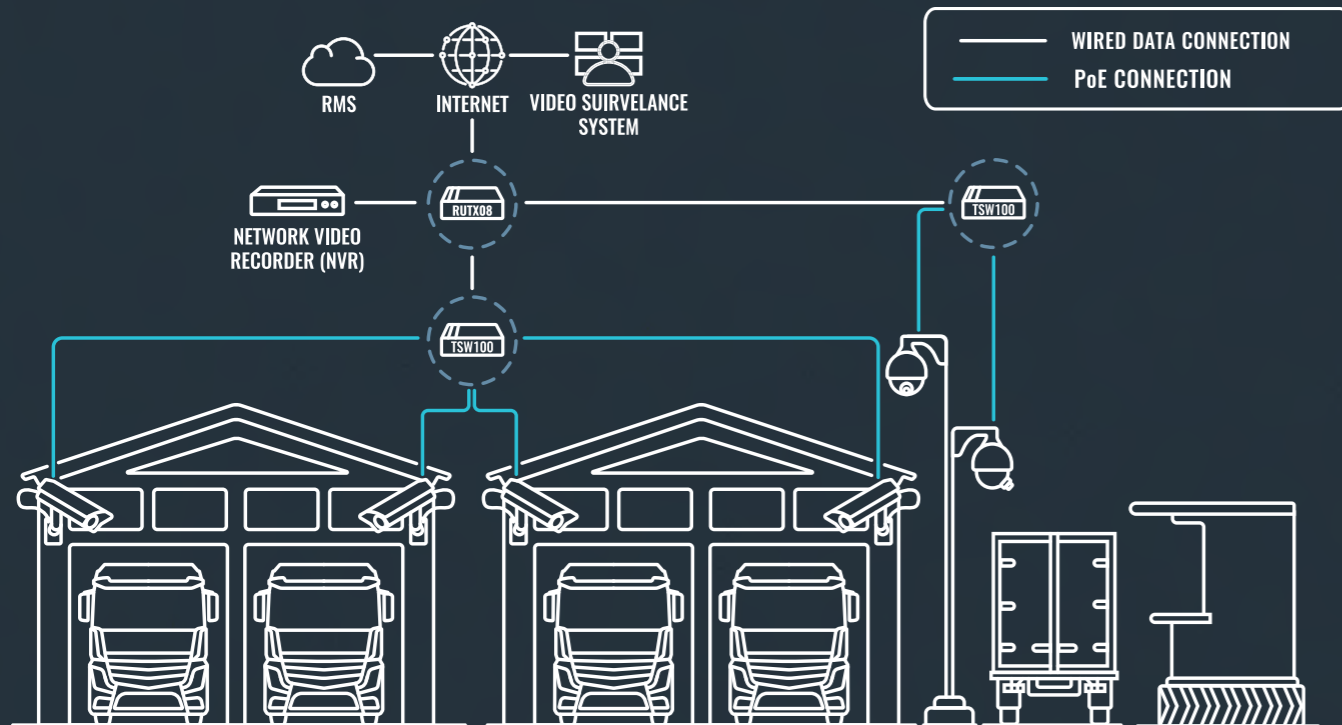

# VOIP CONNECTIVITY ACROSS BRANCHES AND HOME OFFICES



// ENTERPRISE

More than 30% of all businesses use VoIP systems. The Global VoIP market share is expected to reach \$55 billion by 2025. Although the biggest spurt in growth was up to 2012, it remains growing steadily to this day, and not without a reason. It is a cost-efficient and convenient way for a business to set up communication with other VoIP or landline users via the internet. It is expected that small to mid-size businesses will find VoIP especially attractive in the coming years due to smaller costs of implementation and remote work trends.

## SOLUTION


In this solution, remote offices and employees working from home can use the same Call Server, connected to the internet using a RUTX08 Gigabit Ethernet router. RUTX08 offers enough data throughput for a bandwidth-demanding VoIP system and ensures reliable internet connectivity.

In the headquarters, TSW100 is used to connect the multiple IP phones in the office to the internet and powers them up at the same time, making the setup process very simple and quick. TSW100 switch can power up other devices as well, like IP cameras and Access Control System, as you may notice in the Branch connectivity bit.

RUTX08 comes with built-in RutOS software, offering advanced security features, such as multiple supported VPN services, Firewall, making this device a superb performer for such solutions. Firewall and VPN encryption ensures that the communication is taking place securely, even when the employees are working from their homes. Remote Management System (RMS) allows to configure all routers remotely and even reach the devices behind them, like the IP phones, cameras via RMS Connect.

## BENEFITS

- /Gigabit Ethernet – RUTX08 offers enough bandwidth to ensure good call quality.
- /Easy and economical setup – using TSW100 reduces the number of wires and the setup time.
- /Security – provided by Firewall and VPN data encryption.
- /Remote Management – with RMS Connect IT administrators can reach the routers and devices behind them for updates, maintenance and configuration.
- /A single vendor to connect everything – TSW100 allows to connect the IP phones, cameras, Access Control, making the maintenance process easier.

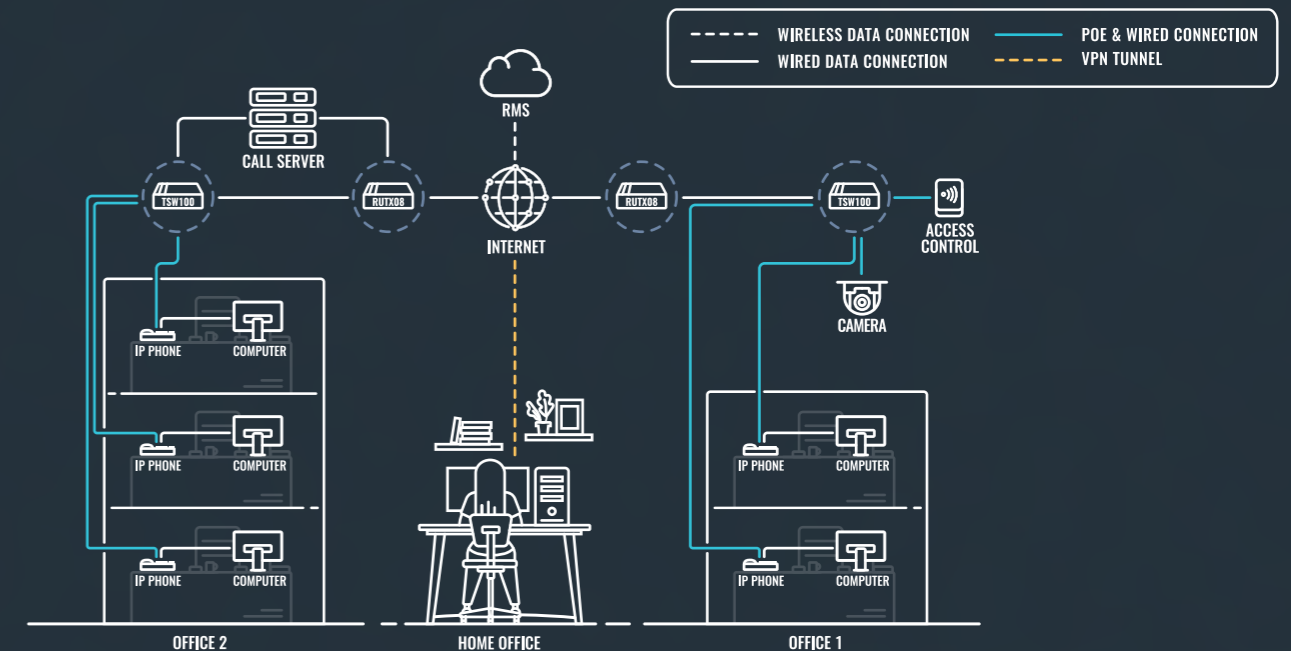

# RUT300

## INDUSTRIAL ETHERNET ROUTER

Rugged industrial fast Ethernet router comes with the benefits of RutOS, advanced security features, and a possibility to connect to the RMS. Five fast Ethernet ports, two configurable digital inputs/outputs, and a USB 2.0 allow to easily connect industrial machinery, office or retail equipment, and other devices to the internet.

### INTERFACES

5 x Fast Ethernet ports (10/100 Mbps), 2 x Configurable digital Inputs/Outputs and USB 2.0

### DURABILITY

Rugged aluminum housing capable to withstand harsh environments

### VPN

Numerous VPN services including OpenVPN, IPsec, PPTP, L2TP & DMVPN, L2TP, DMVPN,

### RMS

For remote management, access & VPN services

### STANDARD PACKAGE CONTAINS:

RUT300 // 9 W PSU // Ethernet cable (1.5 m) // RMS Flyer // QSG (Quick Start Guide) // Packaging box

# HARDWARE



CPU	QCA9531, MIPS 24kc, 650 MHz
Memory	64 MB, DDR2
Storage	16 MB, SPI Flash
Powering option	4 pin power socket, 7-30 VDC
Ethernet	5 x 10/100 Ethernet ports: 1 x WAN, 4 x LAN
Inputs/Outputs	On 4 pin socket: 2 x Configurable digital Inputs/Outputs open collector output
Other	1 x USB Host
Status LEDs	5 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option and grounding capability
Dimensions (W x H x D)	100 x 30 x 85 mm
Weight	229 g

# SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Routing	Static routes, Routing rules, Dynamic routes (BGP, OSPFv2, RIPv1/v2, EIGRP, NHRP)
Firewall	Port forward, Traffic rules, Custom rules, Pre-configured firewall rules, DMZ, NAT, NAT-T, NAT helpers, Unlimited firewall configuration via CLI
Security	DDOS prevention (SYN flood protection, SSH attack prevention, HTTP/HTTPS attack prevention), Port scan prevention (SYN-FIN, SYN-RST, X-mas, NULL flags, FIN scan attacks)
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, ZeroTier, WireGuard
Monitoring and Management	WEB UI, CLI, SSH, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Services	DDNS, Wake On Lan (WOL), WEB filter, UPNP, Network shares (Samba), Traffic Logging
Administration	Multi user, Configuration profiles, Diagnostics, logs, Configuration backup





# RUTX08

## INDUSTRIAL ETHERNET ROUTER

This robust industrial router has four Gigabit Ethernet ports, a Quad-Core CPU, and 256 MB RAM. These powerful specifications combined with core RutOS software features, such as multiple VPN services, advanced Firewall, and RMS support, make this device a superb industrial performer.

### GIGABIT ETH

4 x Gigabit Ethernet ports with up to 128 port/tag-based VLANs supported

### VPN

Numerous VPN Protocols supported, including OpenVPN, IPsec, PPTP, L2TP & DMVPN

### PROTOCOLS

Compatible with industrial DNP3 & Modbus communication protocols

### RMS

For remote management, access & VPN services

## STANDARD PACKAGE CONTAINS:

RUTX08 // 9 W PSU // Ethernet cable (1.5 m) // RMS Flyer // QSG (Quick Start Guide) // Packaging box

# HARDWARE

CPU	Qualcomm, 4 x ARM Cortex A7, 717 MHz
Storage	256 MB Flash
Memory	256 MB RAM
Powering option	4pin power socket, 9-50 VDC
Ethernet	4 x 10/100/1000 Ethernet ports: 1 x WAN (configurable as LAN), 3 x LAN
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output
Other	1 x USB Host
Status LEDs	8 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option and grounding capability
Dimensions (W x H x D)	115 x 32.2 x 95.2 mm
Weight	345 g

# SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Routing	Static routes, Dynamic routes (BGP, OSPFv2, RIPv1/v2, EIGRP, NHRP), Routing rules
Firewall	Port forward, Traffic rules, Custom rules, Pre-configured firewall rules, DMZ, NAT, NAT-T, NAT helpers, Unlimited firewall configuration via CLI
Security	DDOS prevention (SYN flood protection, SSH attack prevention, HTTP/HTTPS attack prevention), Port scan prevention (SYN-FIN, SYN-RST, X-mas, NULL flags, FIN scan attacks)
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, WireGuard, ZeroTier
Monitoring and Management	WEB UI, CLI, SSH, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Services	DDNS, VRRP, Wake On Lan (WOL), WEB filter, UPNP, Network shares (Samba), Traffic Logging
Administration	Multi user, Configuration profiles, Diagnostics, logs, Configuration backup



# RUTX10

## PROFESSIONAL ETHERNET ROUTER

This professional router combines the best of wired and wireless routing functionalities with Gigabit Ethernet, Bluetooth LE, and AC Wi-Fi. Advanced remote management capabilities along with numerous supported security and networking protocols make RUTX10 an ideal choice for professional applications.

### GIGABIT ETH

4 x Gigabit Ethernet ports with up to 128 port/tag-based VLANs supported

### WI-FI & BT

Wave-2 802.11ac Dual Band WIFI and Bluetooth LE

### MULTIPLE VPNs

Numerous VPN Protocols supported, including OpenVPN, IPsec, PPTP, L2TP & DMVPN

### RMS

For remote management, access & VPN services

## STANDARD PACKAGE CONTAINS:

RUTX10 // 18 W PSU // 2 x WiFi antennas (swivel, RP-SMA male) // 1 x Bluetooth antenna (magnetic mount, RP-SMA male, 1.5 m cable) // Ethernet cable (1.5 m) // RMS Flyer // QSG (Quick Start Guide) // Packaging box

# HARDWARE

CPU	Qualcomm, 4 x ARM Cortex A7, 717 MHz
Storage	256 MB Flash
Memory	256 MB RAM
Powering option	4pin power socket, 9-50 VDC
Antenna connectors	2 x RP-SMA for WiFi, 1 x RP-SMA for Bluetooth
Ethernet	4 x 10/100/1000 Ethernet ports: 1 x WAN (configurable as LAN), 3 x LAN
WiFi	IEEE 802.11b/g/n 2.4GHz, IEEE 802.11ac/n/a 5GHz, Access point (AP), Station (STA)
Bluetooth	4.0 (Low energy)
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output
Other	1 x USB host
Status LEDs	2 x WiFi, 8 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option and grounding capability
Dimensions	115 x 32.2 x 95.2 mm
Weight	355 g

# SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Routing	Static routes, Dynamic routes (BGP, OSPFv2, RIPv1/v2, EIGRP, NHRP), Routing rules
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, WireGuard, ZeroTier
Monitoring and Management	WEB UI, CLI, SSH, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Hotspot	External/Internal Radius, SMS OTP, MAC authentication, Walled Garden
Supported Hotspot platforms	IronWiFi, HotspotSystem, Cloud4Wi, SAI + WiFi, MugiCloud, Purple.ai
Services	DDNS, VRRP, Wake On Lan (WOL), WEB filter, UPNP, Network shares (Samba), Traffic Logging

# MESH NETWORK ENABLING SMART FACTORY CONNECTIVITY



// INDUSTRIAL & AUTOMATION

Industry 4.0 and the increasing scale of automation are revolutionizing manufacturing. With every developed innovative technology, less and less human interaction is required in the day-to-day operation of factories. The benefits of automation are multiple: it helps eliminate human errors, increase productivity, reduce costs and acquire valuable data for future optimization. And that is why the global industrial automation market is growing at an exponential rate, expecting to have surpassed 200 billion US dollars next year.

## SOLUTION

Factory connectivity solution requires professional rugged routers that can sustain the challenges of an industrial environment. Naturally, each device can only cover only a limited area with desirable signal strength. For this reason, multiple RUTX10 Ethernet routers were installed to enable a strong-enough Wi-Fi and ensure seamless operation of all the computers and machinery. While setting up one router does not take a lot of IT resources, configuring multiple to create a secure network can become a time and energy-consuming project. In such cases - creating a Wi-Fi Mesh network could be your best bet.


The 802.11s standard available in RutOS allows connecting various wireless equipment without setting up complicated infrastructure. Mesh Wi-Fi enables quick and easy configuration. All you need to do is configure one router and apply the same properties to the rest of the network via a user-friendly WebUI. Besides, if one node in the network

fails or disconnects, the Mesh network will self-heal and continue the route onto the next node until the issue is resolved. This way, the network continuity remains uninterrupted, and the processes may continue as they were.

Since the factory topology includes moving objects (like autonomous forklifts), this adds another challenge: they need a fast transition between one router and another. That is where 802.11r support (aka Fast Roaming) comes into the picture to save the day. With Fast Roaming, autonomous moving machines can travel around production facilities and seamlessly communicate, quickly switching among routers of the same network.

## BENEFITS

- /Equipped with Dual Band Wi-Fi 5 802.11ac, RUTX10 offers high data transmission and robust wireless performance.
- /Multiple supported protocols, including MQTT, Modbus, Bluetooth, DNP3, make this router suitable for industrial automation solutions.
- /The solution is easily scalable due to the simplicity of the Wi-Fi Mesh network configuration.
- /Advanced security features, like multiple VPN choices, Firewall, access control, and others, ensure the system runs uncompromised.
- /The solution can be remotely monitored and managed with Teltonika Networks Remote Management System (RMS).
- /Industrial aluminum casing of the router ensures that it sustains challenging environments and offers convenient mounting options.

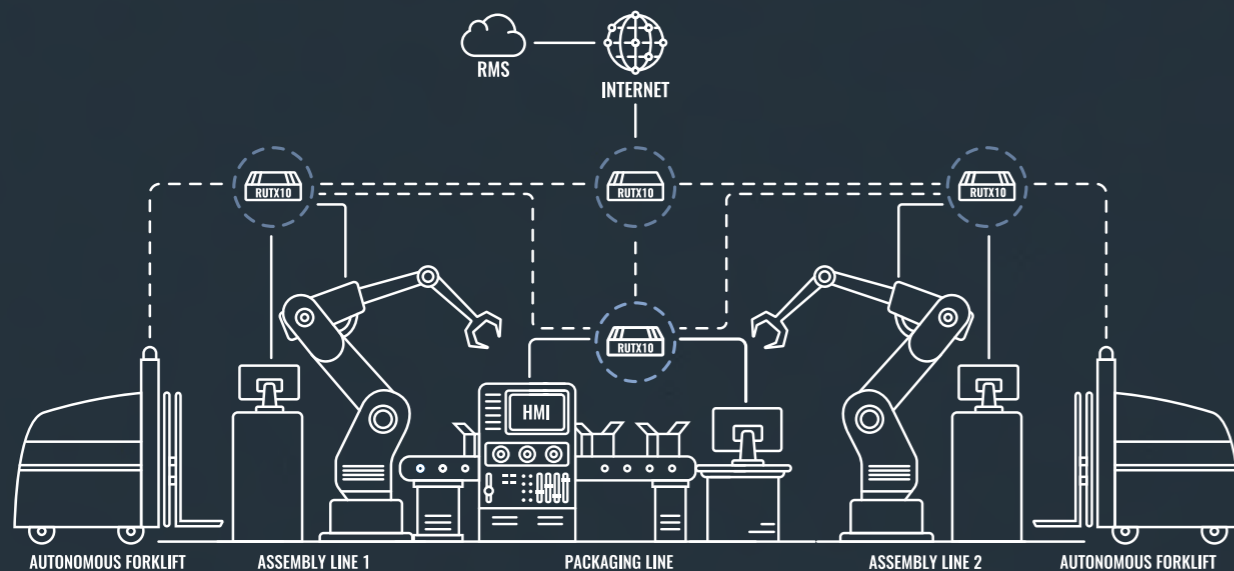

# SECURE CONNECTIVITY FOR BANK BRANCHES



// ENTERPRISE

Today's banking would be unimaginable without the internet and technology. Not a single service could be provided without having access to the internet, connecting various systems and databases of a bank. The financial sector is among the most rapidly changing verticals nowadays. While in some places of the world the growth of mobile and internet banking is making a portion of physical banks obsolete, in other places the number of branch additions is still on the rise, or elsewhere they are getting reshaped to meet the changing market needs and methods of providing services.

## SOLUTION


The bank branches in the US and across the world are getting smaller in size and the staff. The number of full-time employees has declined and varies on average from 3 to 8 per branch. As seen in topology, such branches do not require a complicated network infrastructure and Ethernet connectivity fully suffices the day-to-day operations.

RUT300 Ethernet router has five fast Ethernet ports to easily plug in the computers and gives immediate access to the internet. It is a small device that will easily fit into any cabinet or on a desk and the Passive PoE feature makes it very simple to deploy avoiding additional wires and messy setups. A USB port can be used to easily

connect a printer or other office equipment to the network. This device enjoys an abundance of RutOS benefits. It comes with a preconfigured Firewall, meaning that it is immediately safe to use. It also offers a selection of 10 different VPN services to establish a secure and private connection between the branches and the headquarters. RUT300 is compatible with Remote Management System (RMS), so the routers can be easily configured, updated, and troubleshot from a distanced location. Additionally, RMS Connect allows you to reach the equipment connected to the routers and manage it remotely as well (e.g., computers, printers, IP phones, etc.).

## BENEFITS

- /Simple setting-up process – such solution takes minutes to connect and can be easily transferred to a new setting.
- /Security – pre-configured Firewall makes the device safe to use from the very first seconds without complicated configurations.
- /Multiple VPNs – 10 various VPN services to choose from to establish a private connection between the remote branches and the headquarters.
- /Small sized device – will fit into any server cabinet, drawer, or simply anywhere when using a DIN rail mounting option.
- /Remote management of the whole solution – via RMS Connect.

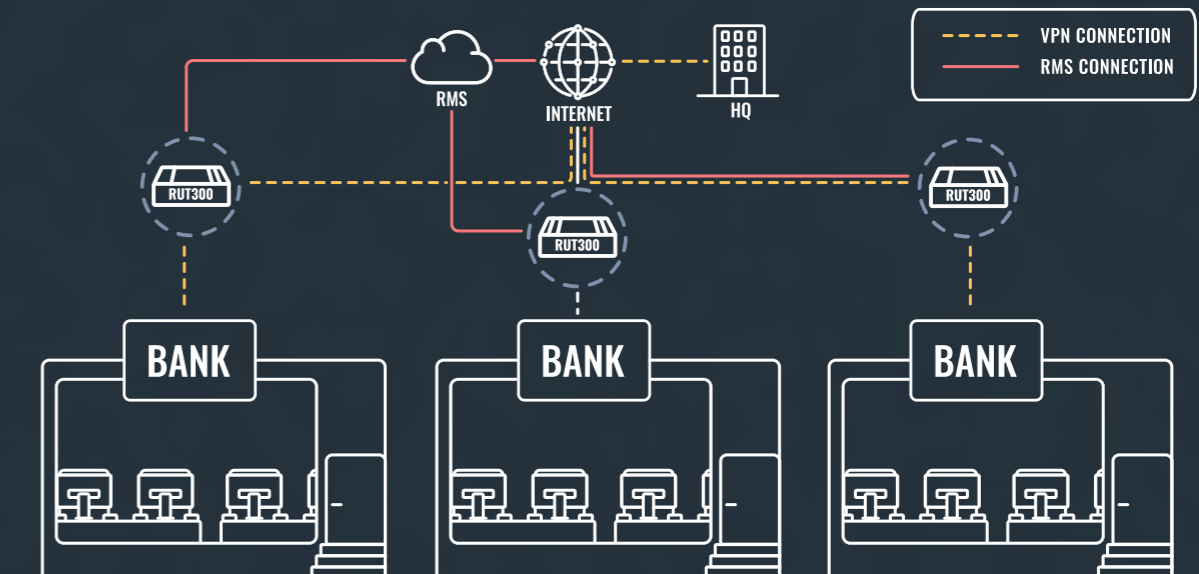



# ETHERNET & WIRELESS DEVICES COMPARISON

Products key features	SWITCHES								ROUTERS		
	TSW010	TSW100	TSW101	TSW110	TSW114	TSW200	TSW210	TSW304	RUT300	RUTX08	RUTX10
CPU (MHz)									650	4x717	4x717
RAM (MB)									64	256	256
Flash memory (MB)									16	256	256
Passive PoE											
PoE out	802.3af/at		802.3af/at		802.3af/at						
Power voltage (VDC)	9-30	7-57	9-30	9-30	9-30	7-57	7-57	7-57	7-30	9-50	9-50
Ethernet ports	5	5	5	5	5	8	8	4	5	4	4
SFP ports						2	2				
Ethernet speed (Mbps)	100	1000	1000	1000	1000	1000	1000	1000	100	1000	1000
WiFi standard											ac
Inputs/Outputs									2	2	2
Bluetooth											
USB									Host	Host	Host
DIN Rail mounting											
Flat surface mounting											
Grounding terminal											
RMS support											
RutOS											

# ACCESSORIES / POWERING OPTIONS



**Power supply, 9 W**  
EU: PR3PUEU3 // UK: PR3PUUK3  
AU: PR3PUAU3 // US: PR3PUUS3



**2-pin power supply, 9 W**  
EU: PR3PREU6 // UK: PR3PRUK6  
AU: PR3PRAU6 // US: PR3PRUS6



**Power supply, 18 W**  
EU: PR3PXEU3 // UK: PR3PXUK3  
AU: PR3PXAU3 // US: PR3PXUS3



**Power supply, 24 W**  
EU: PR3P2EU3 // UK: PR3P2UK3  
AU: PR3P2AU3 // US: PR3P2US3



**Power supply, 50 V, 1.3 A**  
EU: PR3PWEU3 // UK: PR3PWUK3  
AU: PR3PWAU3 // US: PR3PWUS3



**Universal power supply, 9 W**  
Order code: PR3PUPS3



**4-pin to barrel socket adapter**  
Order code: PR2PD01B



**4-pin power adapter with I/O access**  
Order code: PR5MEC21



**Automotive power supply**  
Order code: PR2AM20M



**Power cable whit 4-way screw terminal**  
Order code: PR2FK20M



**Power cable whit 4-way open wire**  
Order code: PR2PL15B



**4-pin plug with contact terminals**  
Order code: PR4MK04K



**DIN Rail power supply**  
Order code: PR3PDNPO

# ACCESSORIES / ANTENNA OPTIONS



**COMBO MIMO mobile/GNSS/  
WiFi ROOF SMA antenna**  
Order code: PR1KCO28



**COMBO QUAD mobile/GNSS  
ROOF SMA antenna**  
Order code: PR1KCL28



**COMBO SISO mobile/GNSS/  
WiFi ROOF SMA antenna**  
Order code: PR1KCS28



**COMBO MIMO mobile  
ROOF SMA antenna**  
Order code: PR1KCL25



**Mobile magnetic SMA  
antenna**  
Order code: PR1KS210



**Mobile SMA antenna**  
Order code: PR1US440



**WiFi magnetic SMA antenna**  
Order code: PR1KRF30



**WiFi SMA antenna**  
Order code: PR1URF51



**Bluetooth magnetic SMA  
antenna**  
Order code: PR1KRT25



**GNSS Adhesive SMA  
antenna**  
Order code: PR1KSG30



**Mobile adhesive sma  
antenna**  
Order code: PR1AS420



**WiFi dual-band SMA  
antenna**  
Order code: PR14RD35



**WiFi dual-band magnetic  
antenna**  
Order code: PR1KRD30



**Angled Compact Mobile  
antenna**  
Order code: PR1US450



**Straight Compact Mobile  
antenna**  
Order code: PR1CS450

# ACCESSORIES / MOUNTING OPTIONS



**Compact DIN Rail Kit**  
Order code: PRMEC11



**DIN Rail Kit**  
Order code: PR5MEC00



**Surface mounting Kit**  
Order code: PR5MEC12



**Surface clip holder Kit**  
Order code: PR5MEC22

# OUR WORLDWIDE PRESENCE



## CONTACT US



[info@teltonika.lt](mailto:info@teltonika.lt)



**Advantec Srl**

Via Caduti per la Libertà, 13

10060 Pinasca TO - Italy

Tel. +39 0121326770

info@advantec.it - www.advantec.it



**Crowd-support forum**  
<https://community.teltonika.it/>



**Wiki knowledge base**  
<https://wiki.teltonika.it/>



**Teltonika-networks**  
<https://teltonika-networks.com/>